Brannan

Thermometers & Instrumentation

Garden, Home & Leisure

- Gardenware
- Timers & Counters
- Veterinary & Pet Care
- Personalised Products
- Homeware
- Medical & Healthcare
- Meteorological Instrumentation
- Calibration Services

Brannan

Measuring Success

Brannan Thermometers & Instrumentation

Measuring Success



S. Brannan & Sons has manufactured and supplied thermometers, gauges and instrumentation since 1913.

Over a century of tradition, combined with modern manufacturing methods at our facilities in the UK ensure unequalled service.

The Company has operated a quality management system since 1991 and currently operates within the scope of ISO 9001: 2008.

Complimenting our production facilities, the Company provides a calibration service operating its own UKAS accredited laboratory where, in addition to having new thermometers tested, customers may also have existing instruments re-calibrated.

Following the 2014 EU ban on mercury, a wide choice of electronic instruments and organic, non-hazardous filling materials, including our Patented LO-***tox***™ fillings, are available.

This catalogue describes a wide range of products for a variety of applications. Standard items are normally available for immediate delivery. Many can be supplied with customer branding or include modifications to suit special applications.

Products in this catalogue are generally supplied on **Brannan** standard packaging, or customer's own packaging (quantity dependant) and many are also available bulk packed.

Customers' requirements can be discussed with our Sales Team.
Products may also be viewed our website: **www.brannan.co.uk**

Please note:
- All electronic instruments are supplied with batteries and full instructions.
- All dimensions are for unpacked products
- All information is correct at time of printing but our policy is one of continuous product development. We reserve the right to change specification without notice.

UKAS CALIBRATION
0852

Contents

Contact Details 2

Gardenware Range 3 - 12
Soil Thermometers, Rain Gauges, Pool & Pond Thermometers, Greenhouse & Conservatory, Weatherstations, Max/Min Thermometers

Homeware Range 13 - 34
Food Preparation Instruments, Freezer & Refrigeration Thermometers, Wall Thermometers, Clocks, Dial Instruments, Window Thermometers, Weatherstations, Family Healthcare,

Timers & Counters 35 - 40
Digital Timers, Stopwatches, Tally Counters, Sand Timers

Medical & Healthcare Range 41 - 48
Personal Healthcare, Environment Monitoring, Food Monitoring

Veterinary & Pet Care 49 - 52
Veterinary Thermometers, Terrarium Instruments, Brooder Thermometers, Pool & Pond Thermometers, General Application Thermometers

Meteorological Range 53 - 58
Rain Gauges, Environmental Meters, Hygrometers, Weatherstations

Calibration Services 59 - 60
UKAS Accredited Laboratory and Certificates of Calibration

Index 61 - 63

How to Contact Us

Contact Details

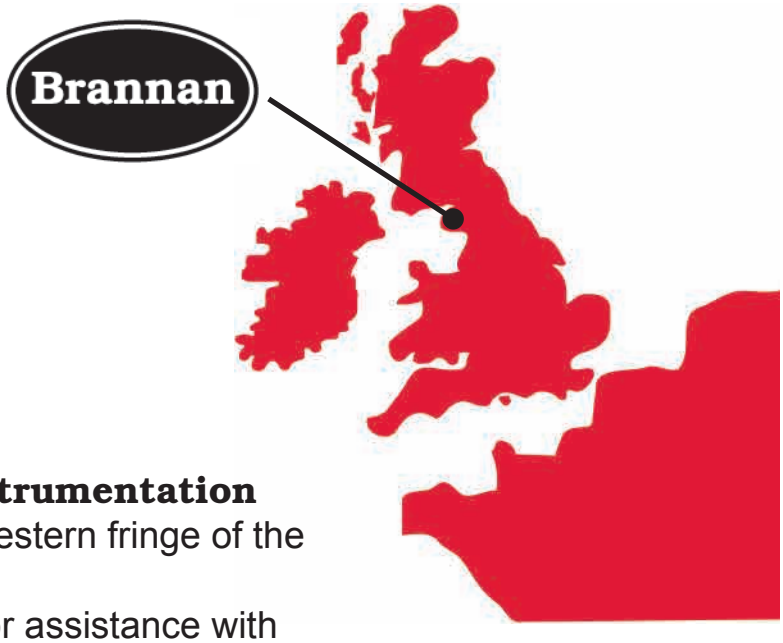

Brannan Thermometers & Instrumentation
is located in Cleator Moor on the western fringe of the English Lake District.
Please see below contact details for assistance with your enquiries or to place an order.
All of our prices are competitive and quantity discounts apply.
Alternatively, small orders can be placed on our webshop.

WEB SHOP
www.brannanshop.co.uk

WEBSITE
www.brannan.co.uk

EMAIL
sales@brannan.co.uk

PHONE
+ 44 (0)1946 816600

FAX
+ 44 (0)1946 816625

ADDRESS

S.Brannan & Sons
Leconfield Industrial Estate
Cleator Moor
Cumbria
UK
CA25 5QE

Gardenware Range

- Soil Thermometers
- Rain Gauges, Pool & Pond Thermometers
- Greenhouse & Conservatory
- Weatherstations
- Max/Min Thermometers

Brannan

Soil Thermometers

The following product have been developed specifically for measurement of soil and propagator temperature for the amateur gardener and professional horticulturist.

3-Way Soil Meter

Robust meter for measuring levels of light, moisture and PH in soil. With strong plastic case and 2 x 180mm metal probes.
Dimensions: 265 x 60 x 37.5mm
13/400/0

Soil PH Meter

Robust meter for measuring PH levels in soil. Strong plastic case and 175mm metal probe.
Dimensions: 265 x 60 x 37.5mm
13/402/0

Traceable Calibration Available

Statement of Conformity Available

Propagation Thermometer

150mm green propagation thermometer with white temperature scale.
Range: 0 to +50°C&F
Dimensions: 155 x 32 x 10mm
13/418/3

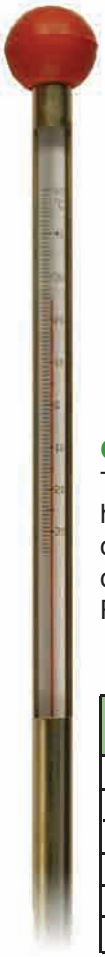

Gardener's Pocket Test Thermometer

150mm gardener's test thermometer with black temperature scale and blue protective pocket case.
Range: -30 to +50°C&F
Dimensions: 160 x 20 x 16mm
13/403/3

Glass Stem Thermometers

These instruments are frequently required in the agricultural and horticultural industries to check temperatures of soil, compost or silage. They are available in three lengths and have a 26mm diameter red knob at the top for easy location.
Replacement refill thermometers also available (except 13/417/3).

Application	Stem Length	Range	Case Material	Product Number	Refill Product No
Soil	230mm	-10 to +110°C&F	Aluminium	**13/417/3**	n/a
Hotbed	320mm	-10 to +110°C only	Aluminium	**15/354/2**	15/754/0
Hotbed	320mm	-10 to +110°C&F	Aluminium	**15/354/3**	15/954/0
Soil	320mm	-10 to +60°C only	Aluminium	**15/554/2**	15/854/2
Soil	320mm	-5 to +65°C&F	Aluminium	**15/554/3**	15/854/3
Soil/concrete	490mm	-35 to +50°C only	Brass	**15/358/2**	15/458/2

Rainfall Measures

Rain Gauge Kit

Heavy duty UV stabilised polypropylene moulded funnel and body.
The measuring jar acts as the collection vessel and is calibrated in millimetres and inches. Rainfall capacity of up to 400ml. The kit is supplied complete with rainfall register book.
Spare 100mm jars and weather registers available.
Range: 0 to 50mm / 0 to 2in
Dimensions: 290 x 120mm diameter
Rain Gauge Kit - 13/070/0
Replacement Jar - 13/061/0
Replacement Register Book - 13/062/0

BEST SELLER

Rainfall Sprinkler Measure

A simple rain gauge in translucent material calibrated in millimetres and inches. Rainfall capacity of up to 400ml.
Supplied with rainfall chart.
Replacement charts available.
Range: 0 to 50mm / 0 to 2in
Dimensions: 210 x 100mm diameter
Rainfall Measure - 13/414/3
Replacement Charts - 13/063/0

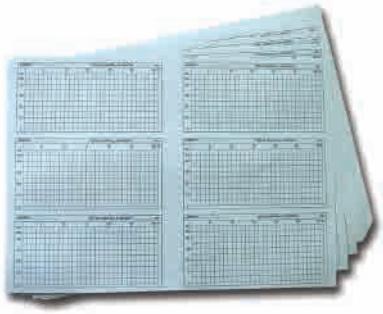

Pool and Pond Thermometers

Thermometers to monitor the temperature of pond for carp or other fish, or the temperature of your pool.

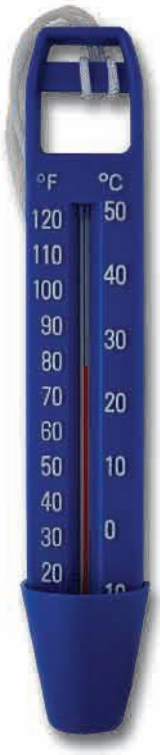

1. Scoop Pool & Pond Thermometer

230mm blue scoop pool and pond thermometer with blue temperature scale. Easy to use instrument to check water temperature by sampling.
Range: -10 to +50°C&F
Dimensions: 245 x 46 x 30mm
18/410/3

2. Floating Pool Thermometer

Blue float supports a white thermometer with blue temperature scale.
Range: -10 to +50°C&F
Dimensions: 175 x 60 x 70mm
18/416/3

Pool Thermometer Description	Range	Product Dimensions	Product Number
1. Scoop Thermometer	-10 to +50°C&F	245 x 46 x 30mm	**18/410/3**
2. Floating Thermometer	-10 to +50°C&F	175 x 60 x 70mm	**18/416/3**

Greenhouse, Conservatory and Garden Instruments

The following **Brannan** items are suitable for use in the garden and can be placed in a greenhouse, conservatory or sheltered area of your garden. These thermometers can be supplied with certificate traceable to Recognised National Standards or Statement of Conformity, if required.

Traceable Calibration Available

Statement of Conformity Available

Decorative 380mm Wall Thermometer

Large wall thermometer with decorative orange print and flower design. Suitable for indoor or outdoor use.
Range: -20 to +50°C&F
Dimensions: 380 x 75 x 10mm
14/480/3

380mm Wall Thermometer

Standard plastic wall thermometer suitable for indoor or outdoor use. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 380 x 75 x 10mm
14/433/2 (°C only)
14/433/3 (°C&F)

Personalised Products

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork. Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design.
Customer branded packaging can also be arranged to complete the look of your products.
Please contact our Sales Team for details.
(MOQs apply.)

BEST SELLER

145mm Wall Thermometer

Standard plastic wall thermometer suitable for indoor or outdoor use. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 145 x 35 x 7mm
14/436/2 (°C only)
14/436/3 (°C&F)

215mm Wall Thermometer

Standard plastic wall thermometer suitable for indoor or outdoor use. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 215 x 40 x 8mm
14/435/2 (°C only)
14/435/3 (°C&F)

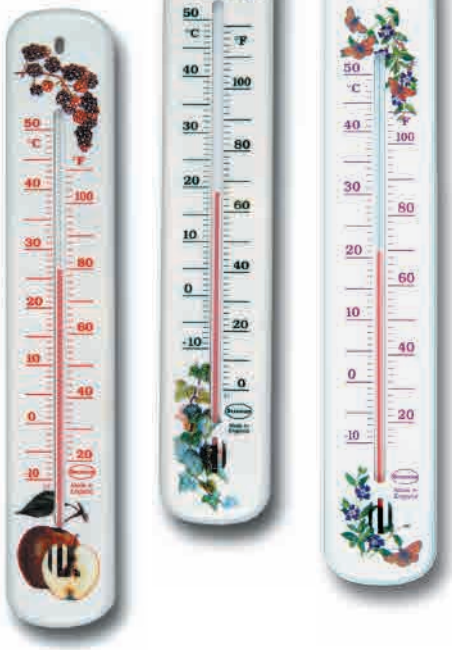

Decorative 215mm Wall Thermometers

Choice of three attractive wall thermometers with individual designs and co-ordinating scale print. Suitable for use in the home or garden. Also available as pack of six thermometers (two of each designs).
Range: -10 to +50°C&F
Dimensions: 215 x 40 x 8mm
Wild Fruit Design - 14/460/3
Country Gate Design - 14/461/3
Butterfly Design - 14/462/3
Pack of 6 - 14/463/3

270mm Dial Wall Clock
Large clock suitable for use in the home or garden
Dimensions: 270mm diameter x 45mm
28/601/0

270mm Dial Wall Thermometer & Hygrometer
Large dial wall thermometer and humidity meter moulded in white plastic with clear black printed face.
Range: -30 to +50°C only / 10 to 100%RH
Dimensions: 270mm diameter x 45mm
28/602/0

2pc Pack - Clock with Thermometer & Hygrometer Dial - 28/603/0 (1pc each)

Traceable Calibration Available

Statement of Conformity Available

Rainbow Patio Thermometer
Large dial thermometer with easy to read temperature scale and decorative rainbow design.
Range:-20 to +50°C&F
Dimensions: 300mm diameter x 40mm
30/120/5

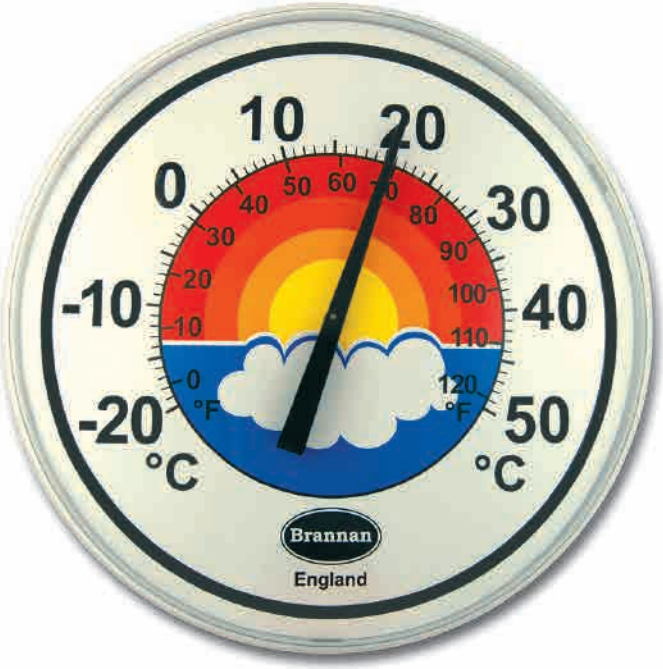

Digital Window Thermometer
Digital thermometer for measuring outdoor temperature. The suction pad fixes to the outside of your window or any flat surface. Large display for easy reading.
Range: -20 to +60°C only
Dimensions: 85 x 43 x 25mm
LCD Dimensions: 30 x 20mm
14/400/2

Dial Window Thermometer
Dial thermometer with easy to read blue and red temperature zones. Fixes to outside of window to read outdoor temperature.
Range: -20 to +50°C&F
Dimensions: 85 x 65 x 10mm
14/419/3

Indoor/Outoor Digital Weatherstations

Digital max/min thermometers to measure humidity and indoor and outdoor temperature. These thermometers can be supplied with certificate traceable to National Standards. External probes can be certified to UKAS Standards.
The instruments are supplied complete with battery and full instructions. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

CE RoHS
WEEE
Compliant

UKAS Calibration Available
Traceable Calibration Available
Statement of Conformity Available

1. Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures. Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for outdoor reading.
Temperature Range: -50 to +70°C&F
Dimensions: 98 x 74 x 17mm
LCD Dimensions: 35 x 52mm
12/412/3

2. Jumbo Max/Min Thermometer & Hygrometer

Twin displays to read indoor temperature and humidity or indoor and outdoor temperatures. Complete with stand and 2m cable.
Temperature Range: -50 to +70°C&F
Humidity Range: 20 to 99%RH
Dimensions: 103 x 98 x 21mm
LCD Dimensions: 60 x 80mm
12/421/3

BEST SELLER

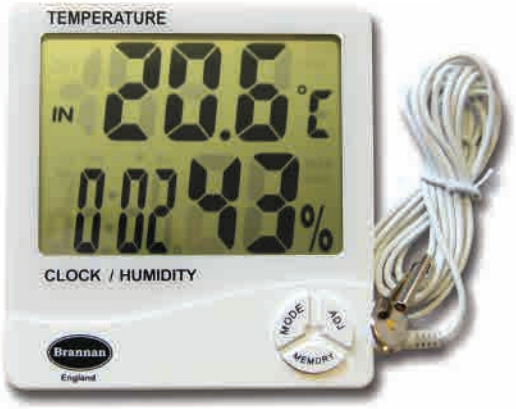

3. Wireless Indoor/Outdoor Thermometer & Hygrometer

Wireless unit with radio frequency for transmission and reception up to 30m. °C/F selectable, indoor/outdoor temperature at a glance with max/min temperature memory and hygrometer.
Temperature Range: -50 to +70°C&F
Hygrometer Range: 1 to 99%RH
Main Unit Dimensions: 121 x 72 x 24mm
Transmitter Dimensions: 100 x 70 x 22mm
LCD Dimensions: 35 x 40mm
12/425/3

Indoor/Outoor Digital Weatherstations

Brannan

4. Weatherstation

Max/min thermometer with silvered front and black trim. Large display with simultaneous reading of temperature and humidity. Alarm functions on both temperature and humidity. Complete with stand or hook for wall hanging and 2m cable for outdoor probe.
Temperature Range: -20 to +70°C&F
Humidity Range: 20 to 99%RH
Dimensions: 98 x 74 x 17mm
LCD Dimensions: 35 x 52mm
13/420/3
Replacement Probe - 13/420/4

CE RoHS
WEEE
Compliant

5. Indoor/Outdoor Thermometer with Clock

Dual scale indoor/outdoor thermometer with max/min record function and clock. Complete with stand and 3m probe cable.
Temperature Range: -50 to +70°C&F
Dimensions: 51 x 72 x 19mm
LCD Dimensions: 13 x 32mm
14/437/3

BEST SELLER

6. Twin Reading Thermometer

Thermometer with max/min feature and high/low alarm settings. Reads outdoor and room temperature simultaneously and is also ideally suited to read room and fridge or freezer temperature. Magnet attachment with 20mm probe and 2m probe cable.
Temperature Range: -50 to +70°C&F
Dimensions: 63 x 63 x 15mm
LCD Dimensions: 21 x 47mm
22/420/3

New

7. Twin Reading Thermometer & Humidity Meter

Instrument to measure indoor and outdoor temperature and humidity. Max/min recording. Main body includes magnet, clip and stand.
2 x 1m cables.
Temperature Range: -50 to +70°C&F
Humidity Range: 10 to 95% RH
Dimensions: 63 x 63 x 22mm
LCD Dimensions: 22 x 40mm
22/425/3

UKAS Calibration Available

Statement of Conformity Available

Weatherstation Description	Range		Max/Min Function	Cable Length	LCD Dimensions	Product Dimensions	Product Number
	Internal Reading	Remote Probe Reading					
1. Max/Min Indoor/Outdoor	0 to +50°C&F	-50 to +70°C&F	✓	2.5m	35 x 52mm	98 x 74 x 17mm	**12/412/3**
2. Jumbo Max/Min Thermometer & Hygrometer	-10 to +50°C&F & 20 to 99%RH	-50 to +70°C&F	✓	2.0m	60 x 80mm	103 x 98 x 21mm	**12/421/3**
3. Wireless Weatherstation	-	-50 to +70°C&F & 1 to 99%RH	✓	2.5m	35 x 40mm	121 x 72 x 24mm & 100 x 70 x 22mm	**12/425/3**
4. Weatherstation	0 to +50°C&F & 20 to 99%RH	-20 to +70°C&F	✓	-	35 x 52mm	98 x 74 x 17mm	**13/420/3**
4. Replacement Probe	-	-	-	2.0m	-	-	**13/420/4**
5. Indoor/Outdoor	-50 to +70°C&F	-50 to +70°C&F	✓	3.0m	13 x 32mm	51 x 72 x 19mm	**14/437/3**
6. Twin Reading Thermometer	-20 to +50°C&F	-50 to +70°C&F	✓	2.0m	22 x 40mm	63 x 63 x 22mm	**22/420/3**
7. Twin Reading Thermometer & Humidity Meter	-10 to +50°C&F & 10 to 95%RH	-50 to +70°C&F & 10 to 95%RH	✓	1.0m	22 x 40mm	63 x 63 x 22mm	**22/425/3**

Max/Min Thermometers

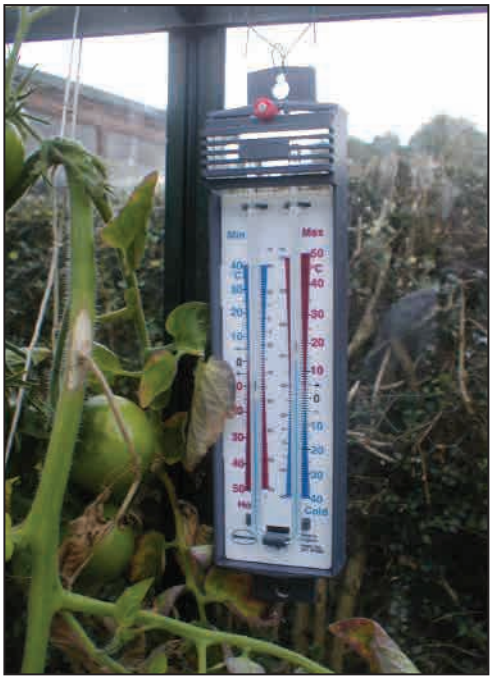

The following **Brannan** items are suitable for use in the garden and can be placed in a greenhouse, conservatory or sheltered area of your garden.
Increasing environmental and health concerns have encouraged the development of **Brannan's** own unique ***mercury free*** maximum minimum thermometers which replace the traditional mercury types, the standard design for over two hundred years. The products use a patented blue coloured liquid to replace the mercury but retain the ease of operation of the mercury instruments. Our range of max/min thermometers are available in a choice of designs with either a quick-set push button reset or a separate magnet reset.
These max/min thermometers can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity, if required.

Traceable Calibration Available

Statement of Conformity Available

1. Magnet Reset Max/Min Solway Thermometers

A modern design with red, blue and black coloured scale in moulded grey plastic. Separate magnet reset and hanging hook on top and bottom of instrument.
Range: -35 to +50°C&F
Dimensions: 250 x 60 x 27mm
12/401/2 (°C only)
12/401/3 (°C&F)

2. Slimline Magnet Reset Max/Min Thermometers

Slimline max/min design in white plastic with blue printed scale. Separate magnet reset and hanging hook on top of instrument.
Range: -35 to +50°C&F
Dimensions: 205 x 55 x 27mm
12/407/2 (°C only)
12/407/3 (°C&F)

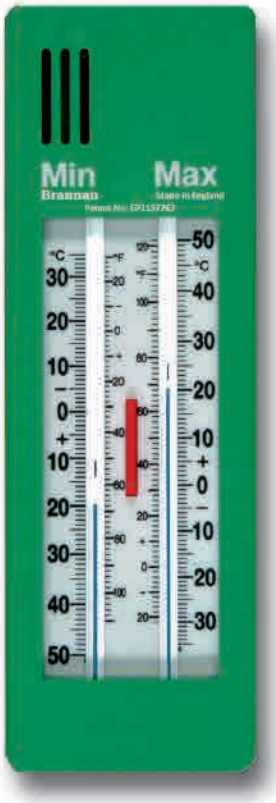

3. Heavy Duty Push Button Max/Min Thermometers

A robust design with bulbs fully protected and reset by press button. Black scale with red reset button in a choice of green or grey case. Includes hanging hook at back of instrument.
Range: -35 to +50°C&F
Dimensions: 200 x 67 x 23mm
12/404/2 (°C only - Green case)
12/404/3 (°C&F - Green case)
12/411/2 (°C only - Grey case)
12/411/3 (°C&F - Grey case)

• European Patent No: EP1157262 • American Patent No: 7011445B • Canadian Patent No: 2365725

BEST SELLERS

Traceable Calibration Available

Statement of Conformity Available

4. Quick Set Push Button Max/Min

This popular design features a press button for quick reset. Available in cream plastic with black temperature scale and red reset button or white plastic with blue temperature scale and reset button. Hanging hook on top of instrument.
Range: -35 to +50°C&F
Dimensions: 205 x 55 x 27mm
12/403/2 (°C only - Cream case)
12/403/3 (°C&F - Cream case)
12/408/2 (°C only - White case)
12/408/3 (°C&F - White case)

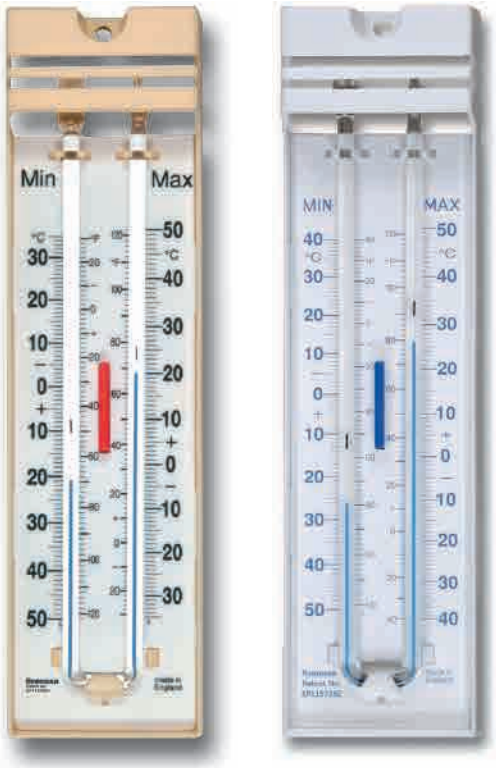

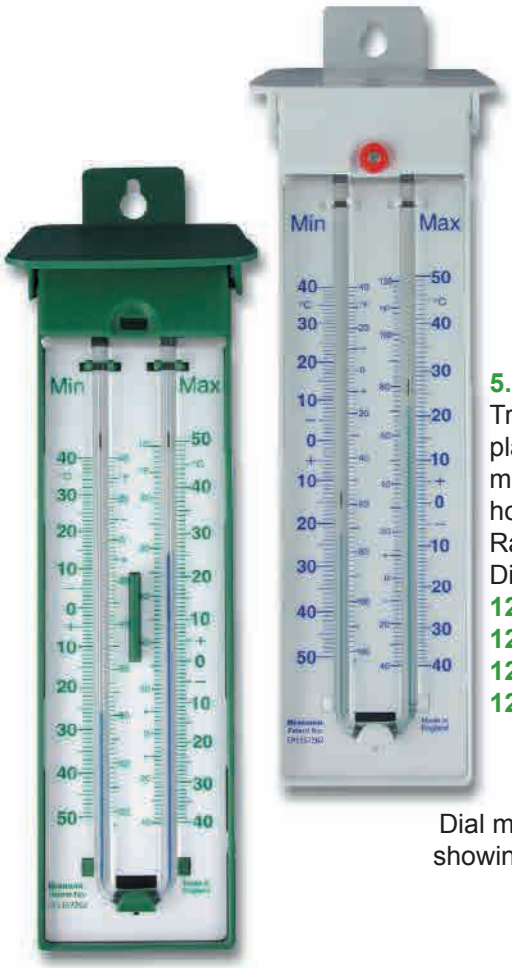

5. Max/Min with Lidded Roof

Traditional design with sloping roof. Choice of green moulded plastic with green temperature scale and reset button or white moulding with blue scale and separate magnet reset. Hanging hook on top of instrument.
Range: -35 to +50°C&F
Dimensions: 226 x 68 x 27mm
12/414/2 (°C only - Green with push button reset)
12/414/3 (°C&F - Green with push button reset)
12/415/2 (°C only - White with magnet reset)
12/415/3 (°C&F - White with magnet reset)

6. Dial Max Min Thermometer

Dial max min thermometer with coloured scale showing maximum and minimum temperatures reached as well as current temperature.
Range: -50 to +50°C&F
Dimensions: 93 x 123 x 34mm
12/450/3

Max/Min Description		Reset	Product Dimensions	Range	Product Number
1. Solway Max/Min		Magnet	250 x 60 x 27mm	-35 to +50°C only	**12/401/2**
				-35 to +50°C&F	**12/401/3**
2. Slimline Max/Min		Magnet	205 x 55 x 27mm	-35 to +50°C only	**12/407/2**
				-35 to +50°C&F	**12/407/3**
3. Heavy Duty Max/Min	Green Case	Push Button	200 x 67 x 23mm	-35 to +50°C only	**12/404/2**
				-35 to +50°C&F	**12/404/3**
	Grey Case	Push Button	200 x 67 x 23mm	-35 to +50°C only	**12/411/2**
				-35 to +50°C&F	**12/411/3**
4. Quick Set Max/Min	Cream Case	Push Button	205 x 55 x 27mm	-35 to +50°C only	**12/403/2**
				-35 to +50°C&F	**12/403/3**
	White Case	Push Button	205 x 55 x 27mm	-35 to +50°C only	**12/408/2**
				-35 to +50°C&F	**12/408/3**
5. Max/Min with Roof	Green Case	Push Button	226 x 68 x 27mm	-35 to +50°C only	**12/414/2**
				-35 to +50°C&F	**12/414/3**
	White Case	Magnet	226 x 68 x 27mm	-35 to +50°C only	**12/415/2**
				-35 to +50°C&F	**12/415/3**
6. Dial Max/Min		Wheel	93 x 123 x 34mm	-50 to +50°C&F	**12/450/3**

Personalised Products

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork. Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design.
Customer branded packaging can also be arranged to complete the look of your products.
Please contact our Sales Team for details.
(MOQs apply.)

Digital Max/Min Thermometers

In addition to the traditional liquid-in-glass max/min thermometers, **Brannan** have a wide range of electronic max/min instruments suitable for indoor or outdoor use. All these instruments have hanging hook for wall mounting. The instruments are supplied complete with battery and full instructions and can be supplied with certificate traceable to Recognised National Standard, if required.
All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

Traceable Calibration Available

Statement of Conformity Available

CE RoHS
WEEE
Compliant

1. Outdoor Electronic Max/Min Thermometer

Grey and white case with large splashproof display for outdoor or indoor use.
Range: -40 to +70°C
Dimensions: 115 x 75 x 44mm
LCD Dimensions: 38 x 40mm
12/424/3

2. Large Electronic Max/Min Thermometers

Robust digital max/min thermometers suitable for outdoor or indoor use in choice of white or green moulding. Triple display shows minimum, maximum and current temperature simultaneously.
Range: -10 to +50°C
Dimensions: 160 x 78 x 31mm
LCD Dimensions: 79 x 60mm
White - 12/426/3
Green - 12/427/3

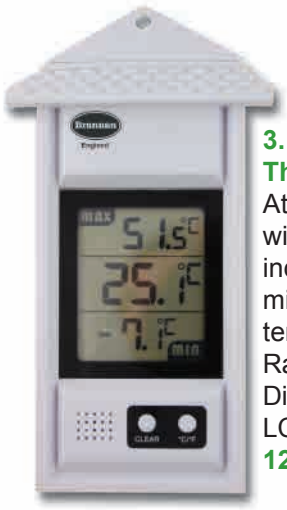

3. Electronic Max/Min Thermometer with Roof

Attractive max/min thermometer with roof suitable for outdoor or indoor use. Triple display shows minimum, maximum and current temperature simulaneously.
Range: -10 to +50°C
Dimensions: 150 x 50 x 29mm
LCD Dimensions: 47 x 39mm
12/428/3

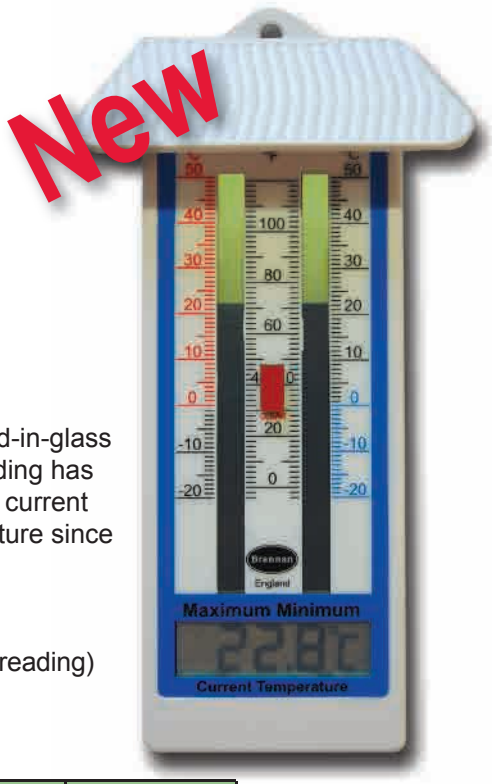

4. Classic Design Max/Min Thermometers with Roof

Max/min thermometer modelled on traditional liquid-in-glass style max/min design but with digital display. Moulding has protective roof for outdoor or indoor use. Displays current temperature and maximum and minimum temperature since last reset.
Range: -20 to +50°C
Dimensions: 203 x 100 x 30mm
LCD Dimensions: 16 x 52mm (current temperature reading)
12/429/3

Thermometer Description	Range	LCD Dimensions	Product Dimensions	Product Number
1. Outdoor Max/Min Thermometer	-40 to +70°C&F	38 x 40mm	115 x 75 x 44mm	**12/424/3**
2. Large Max/Min Thermometer - White	-10 to +50°C&F	79 x 60mm	160 x 78 x 31mm	**12/426/3**
2. Large Max/Min Thermometer - Green	-10 to +50°C&F	79 x 60mm	160 x 78 x 31mm	**12/427/3**
3. Max/Min Thermometer with Roof	-10 to +50°C&F	47 x 39mm	150 x 80 x 29mm	**12/428/3**
4. Classic Design Max/Min Thermometer	-20 to +50°C&F	16 x 52mm	203 x 100 x 30mm	**12/429/3**

Homeware Range

- Food Preparation Instruments
- Wall Thermometers
- Dial Instruments
- Weatherstations
- Freezer & Refrigeration Thermometers
- Clocks
- Window Thermometers
- Family Healthcare

Brannan

Kitchen Range - Food Preparation Instruments

The following thermometers have been developed to assist with food preparation. These thermometers can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity, if required.

Traceable Calibration Available

Statement of Conformity Available

Brass Sugar & Jam Thermometer

250mm brass sugar and jam thermometer with black temperature scale showing recommended cooking temperatures.
Range: +40 to +200°C only
Dimensions: 245 x 47 x 13mm
21/471/2

Stainless Steel Cooking Thermometer

Stainless Steel cooking thermometer with black temperature scale showing recommended temperatures for cooking.
Range: +20 to +200°C only
Dimensions: 320 x 50 x 12mm
21/474/2

Milk & Coffee Test Thermometers

These 45mm diameter dial thermometers incorporate green and red zones enabling fast and easy reading of your milk or coffee temperature. The dials are available in choice of 125mm or 175mm probe and are supplied with a stainless steel clip for attaching to milk jug.
Range: -10 to +100°C&F
Dimensions: 125 x 45mm diameter **31/150/0**
175 x 45mm diameter **31/151/0**

1. Baby Food & Bath Thermometer, 2. Cook's Pocket Test Thermometer 3. Yoghurt Thermometer

Range of pocket test thermometers supplied in protective cases. Baby Food and Bath Thermometer and Cooks Thermometer have clear black scale. Yoghurt Thermometer has zone for easy reading.
Dimensions: 160 x 20 x 16mm

Thermometer Description	Scale	Product No
1. Baby Food & Bath Pocket Test	0 to +50°C&F	**18/348/3**
2. Cooks Pocket Test	-5 to +105°C&F	**21/475/3**
3. Yoghurt Pocket Test	Zones at 43 & 49°C	**21/489/2**

BEST SELLER

Timer & Clock

99 minute, 59 second count down and up timer with 12 hour clock, alarm and memory function. Complete with stand, hanger and magnetic fixings.
Dimensions: 66 x 76 x 20mm
LCD Dimensions: 20 x 48mm
28/210/0

New

Kitchen Timer

Easy to read count up and down timer. 99 minute, 59 second count.
Dimensions: 67 x 79 x 17mm
LCD Dimensions: 22 x 40mm
28/217/0

Kitchen Range - Food Preparation Instruments

Brannan

Food hygiene is now an important area for public concern and is closely associated with temperature control. **Brannan** thermometers provide a quick and economical way to ensure that the correct temperatures are achieved whilst cooking.

Infrared Thermometer

New

Simple and compact infrared thermometer with built in laser targetting. The thermometer detects infrared light waves from objects providing easy and safe, non-contact temperature measurement for a wide variety of applications including food storage, preparation and refrigeration.

CE RoHS
WEEE
Compliant

D:S Ratio: 12:1*
Range: -50 to +500°C&F
Dimensions: 134 x 89 x 36mm
LCD Dimensions: 24 x 25mm
38/703/0

* The meters' field of view, or Distance to Spot (D:S) indicates the distance required from the target spot. Therefore, this thermometer should be 12 inches from the target area. The diameter of the target must be at least 1 inch.

BEST SELLER

Traceable Calibration Available

Statement of Conformity Available

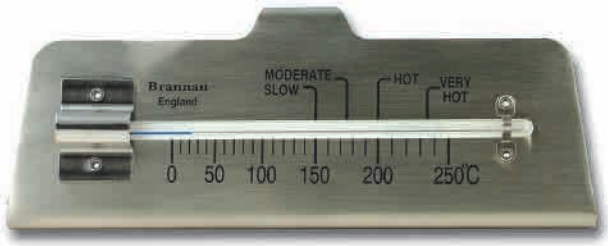

Classic Stainless Steel Dial Oven Thermometer

50mm stainless steel dial oven thermometer with black temperature scale. Suitable for hanging or sitting on oven shelf.
Range: +50 to +230°C&F
Dimensions: 75 x 60 x 30mm
23/400/3

Horizontal Oven Thermometer

Stainless steel oven thermometer with black temperature scale. Suitable for hanging or sitting on oven shelf.
Range: 0 to +250°C only
Dimensions: 53 x 136 x 25mm
23/464/2

Premium Dial Meat Roasting Thermometer

50mm dial meat roasting thermometer with black temperature scale and 105mm probe. Clear text shows recommended temperatures for safe preparation of meat and poultry.
Range: +60 to +90°C only
Dimensions: 110 x 50mm diameter
23/472/2



Barbecue/Grill Thermometer

Square dial thermometer with coloured temperature scale to assist with the safe preparation of food cooked on a BBQ or grill. Casing has hooks suitable for hanging from rack or grill.
Range: +70 to +350°C&F
Dimensions: 63 x 63 x 21.6mm
23/405/3

Classic Dial Meat Roasting Thermometer

BEST SELLER

50mm dial meat roasting thermometer with black animal symbols and clear red zone indicating correct temperatures for safe preparation of meat and poultry.
95mm probe.
Range: 0 to +120°C only
Dimensions: 110 x 50mm diameter
23/401/2

Kitchen Range - Digital Thermometers

The following digital thermometers are ideally suited to temperature monitoring during food preparation. All our digital instruments are CE, WEEE and RoHS compliant. Probe thermometers can be calibrated to UKAS standard if required.

1. Cooking Test Thermometer

Silver coloured digital instrument with three way display simultaneously showing cooking temperature, alarm limit, timer or clock. 230mm stainless steel probe with 1.5m cable. Adjustable angle display. Replacement probes available.
Range: 0 to +300°C
Dimensions: 126 x 75 x 22mm
LCD Dimensions: 36 x 48mm
23/403/3
Replacement Probe - 23/404/0

CE RoHS
WEEE
Compliant

BEST SELLER

2. Swivel Head Pocket Test Thermometer

Pocket test thermometer with 145mm probe. Adjustable head through 180° rotation and spiked stainless steel stem. The pocket case and clip can act as a handle for the instrument during use. Hold facility to record temperature.
Range: -45 to +200°C
Dimensions: 145 x 34 x 30mm
LCD Dimensions: 10 x 20mm
31/147/0

3. Short Pocket Test Thermometer

Water resistant thermometer with max/min memory and 110mm stainless steel probe. Supplied with protective pocket and clip.
Range: -10 to +200°C&F
Dimensions: 175 x 48 x 15mm
LCD Dimensions: 9 x 16mm
31/155/0

4. Long Pocket Test Thermometer

Water resistant thermometer with 210mm stainless steel probe. Supplied with protective pocket and clip.
Range: -10 to +110°C&F
LCD Dimensions: 14 x 25mm
Dimensions: 290 x 55 x 15mm
31/156/0

6. Vertical Barrel Test Thermometer

Test thermometer with vertical display. 120mm stainless steel probe. Supplied with pocket case and clip.
Range: -50 to +150°C&F
Dimensions: 195 x 21 x 21mm
LCD Dimensions: 7 x 17mm
31/160/0

5. Catering Test Thermometer

Max/min thermometer with 125mm stainless steel probe. Supplied with protective cover and hanging hook.
Range: -10 to +200°C&F
Dimensions: 280 x 40 x 38mm
LCD Dimensions: 12 x 30mm
31/157/0

UKAS Calibration Available

Statement of Conformity Available

7. Horizontal Barrel Test Thermometer

Test thermometer with horizontal display. 120mm stainless steel probe. Supplied with pocket case and clip.
Range: -50 to +150°C&F
Dimensions: 152 x 58 x 20mm
LCD Dimensions: 7 x 17mm
31/161/0

New

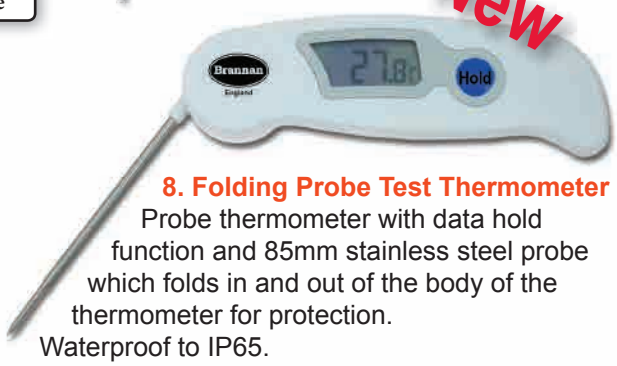

8. Folding Probe Test Thermometer

Probe thermometer with data hold function and 85mm stainless steel probe which folds in and out of the body of the thermometer for protection.
Waterproof to IP65.
Range: -50 to +250°C&F
Dimensions: 45 x 125 x 18mm (closed)
LCD Dimensions: 15 x 32mm
31/175/0

9. Waterproof Test Thermometer

Waterproof thermometer to IP65. With max/min memory and hold functions. 120mm stainless steel probe.
Supplied with pocket case and clip.
Range: -40 to 240°C&F
Dimensions: 200 x 20 x 15mm
LCD Dimensions: 7 x 17mm
31/162/0

New

10. Waterproof Test Thermometer

Waterproof thermometer to IP65. With max/min memory and hold functions and 120mm stainless steel probe.
Supplied with pocket case.
Range: -50 to +300°C&F
Dimensions: 222 x 30 x 15mm
LCD Dimensions: 10 x 27mm
31/163/0

UKAS Calibration Available

Statement of Conformity Available

CE RoHS WEEE Compliant

11. Waterproof Test Thermometer
Dishwasher safe to 88°C

Waterproof thermometer to IPX7. Suitable for use in dishwasher during cycle. With max/min memory and hold functions and 115mm stainless steel probe.
Supplied with pocket case which can be connected to back of thermometer to extend handle.
Range: -40 to +250°C&F
Dimensions: 212 x 36 x 16mm
LCD Dimensions: 15 x 25mm
31/164/0

12. Hand Held Thermometer

Robust 125mm stainless steel probe connected by 1.5m lead. Temperature hold and max/min recording functions. Complete with hanger, stand and magnetic fixtures.
Replacement probes also available.
Range: -50 to +200°C&F
Dimensions: 97 x 65 x 20mm
LCD Dimensions: 16 x 36mm
38/650/0
Replacement Probe - 38/650/1

13. Hand Held Thermometer with Alarm & Timer

Hand held thermometer with alarm function and twin displays.1m cable and 235mm stainless steel probe. Data hold and max/min recording functions. Complete with hanger, stand and magnetic fixtures.
Replacement probes also available.
Range: -50 to +300°C&F
Dimensions: 97 x 65 x 20mm
LCD Dimensions: 16 x 36mm x 2
38/660/0
Replacement Probe - 38/660/1

Thermometer Description	Range	Max/Min Function	Water Resistant	Probe Length	LCD Dimensions	Product Dimensions	Product Number	Replacement Probe
1. Cooking Test	0 to +300°C&F	✗	✗	230mm	36 x 48mm	126 x 75 x 22mm	**23/403/3**	**23/404/0**
2. Swivel Head Pocket Test	-45 to +200°C&F	✗	✗	125mm	10 x 20mm	145 x 34 x 30mm	**31/147/0**	-
3. Short Test	-10 to +200°C&F	✓	✓	110mm	9 x 16mm	175 x 48 x 15mm	**31/155/0**	-
4. Long Test	-10 to +110°C&F	✓	✓	210mm	14 x 25mm	290 x 55 x 15mm	**31/156/0**	-
5. Catering Test	-10 to +200°C&F	✓	✗	125mm	12 x 30mm	280 x 40 x 38mm	**31/157/0**	-
6. Vertical Barrel	-50 to +150°C&F	✗	✗	120mm	7 x 17mm	195 x 21 x 21mm	**31/160/0**	-
7. Horizontal Barrel	-50 to +150°C&F	✗	✗	120mm	7 x 17mm	152 x 58 x 20mm	**31/161/0**	-
8. Folding Probe	-30 to +300°C&F	✓	✗	97mm	8 x 19mm	119 x 30 x 18mm	**31/170/0**	-
9. Waterproof	-40 to +240°C&F	✓	✓	120mm	7 x 17mm	200 x 20 x 15mm	**31/162/0**	-
10. Waterproof	-50 to +300°C&F	✓	✓	120mm	10 x 27mm	222 x 30 x 15mm	**31/163/0**	-
11. Dishwasher Safe	-40 to +250°C&F	✓	✓	115mm	15 x 25mm	212 x 36 x 16mm	**31/164/0**	-
12. Hand Held	-50 to +200°C&F	✓	✗	1.5m	16 x 36mm	97 x 65 x 20mm	**38/650/0**	**38/650/1**
13. Hand Held with Alarm	-50 to +300°C&F	✓	✗	1.0m	16 x 36mm	97 x 65 x 20mm	**38/660/0**	**38/660/1**

Refrigeration - Fridge or Freezer Thermometer

Brannan have a wide range thermometers specifically developed for use in a refridgerator or freezer in both domestic or industrial catering applications. These thermometers will allow you to adjust your appliance for optimum performance to assist with the safe storage of food. All thermometers can be supplied with certificate traceable to Recognised National Standards or Statement of Conformity. External probes can be calibrated to UKAS Standards if required.

1. Digital Fridge or Freezer Thermometer

Electronic thermometer which displays fridge or freezer and room temperature. Alarm feature and 1m cable with suction pad.
Range: -50 to +70°C&F
Dimensions: 25 x 135 x 20mm
LCD Dimensions: 12 x 58mm
22/400/3

2. Stainless Steel Fridge or Freezer Dial Thermometer

50mm dial thermometer with black temperature scale and zones indicating recommended temperature settings for your fridge or freezer. Suitable for hanging or sitting on oven shelf.
Range: -40 to +40°C only
Dimensions: 72 x 62 x 40mm
22/402/2

3. Twin Reading Fridge or Freezer and Room Thermometer

Thermometer with max/min feature and high/low alarm settings, to read temperature in a fridge or freezer and room temperature simultaneously. Magnet attachment with 20mm probe and 2m probe cable.
Range: -50 to +70°C&F
Dimensions: 63 x 63 x 15mm
LCD Dimensions: 21 x 47mm
22/420/3

4. Heavy Duty Fridge or Freezer Thermometers

Clear front horizontal thermometer with blue printed scale on white moulding and clear zones indicating recommended temperature for fridge and freezer. Magnet fixture on back of moulding or stainless steel clips for fixture to appliance.
Range: -30 to +30°C&F
Dimensions: Magnet: 30 x 120 x 13mm
Clips: 30 x 120 x 19mm
Magnet Fixture - 22/430/3
Stainless Steel Clips Fixture - 22/450/3

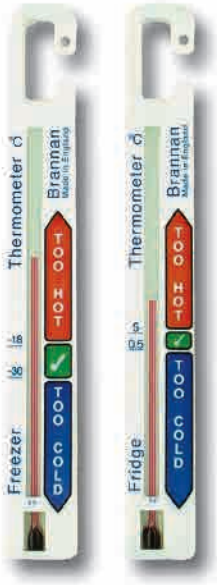

5. Twin Fridge and Freezer Hanging Thermometers

Co-ordinating thermometers, one for use in fridge and second one for use in freezer. Moulded in durable white plastic with easy to read zones and hanging clip. Ideally suited for customers own branding or design.
Zones: -30 to -18°C (freezer)
+0.5 to +5°C (fridge)
Dimensions: 142 x 18 x 6mm x 2pcs
22/440/2

6. Maximum Recording Fridge Guard

130mm white horizontal thermometer with blue temperature scale and marker to record maximum temperature reached by your appliance to indicate when food has been stored at temperatures too high for safe storage.
Range: -30 to +30°C only
Dimensions: 130 x 40 x 22mm
22/482/2

7. Dial Fridge or Freezer Thermometers

Choice of white dial thermometers with zones to indicate recommended temperatures for your appliance. Ideally suited for customers own branding or design.
Range: -30 to +30°C only
Dimensions: 85 x 65 x 12mm
Standard Blue Scale Design - 22/474/2
Penguin Design - 22/475/2

Traceable Calibration Available

Statement of Conformity Available

BEST SELLER

8. Horizontal Fridge or Freezer Thermometers

Choice of horizontal thermometers for use in fridge or freezer. All designs have clear scales printed on white moulding and zones indicating temperatures for safe food storage. Ideally suited for customers own branding or design. Also available as pack of six thermometers (two of each illustrated design).
Range: -30 to +40°C only
Dimensions: 130 x 40 x 22mm

Standard Design: 22/483/2
Polar Bear Design: 22/486/2
Pack of six: 22/489/2
Penguin Design: 22/485/2
Sundae, fish & Cheese: 22/488/2

New

9. Fridge or Freezer Thermometer with Energy Saving Tips

A unique horizontal thermometer for use in fridge or freezer with energy saving tips for your appliance. Ideally suited for customers own branding or design.
Range: -30 to +40°C only
Dimensions: 130 x 40 x 22mm
22/494/2

BEST SELLER

10. Vertical Hanging Fridge or Freezer Thermometer

Vertical thermometer for hanging off fridge or freezer shelf. Moulded in durable white plastic with clear zones indicating temperatures for safe food storage. Ideally suited for customers own branding or design.
Range: -30 to +40°C only
Dimensions: 142 x 18 x 6mm
22/491/2

Personalised Products

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork. Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design.
Customer branded packaging can also be arranged to complete the look of your products.
Please contact our Sales Team for details.
(MOQs apply.)

Traceable Calibration Available

Statement of Conformity Available

Description		Range	Dimensions	Product Number
1. Digital Thermometer		-50 to +70°C&F	25 x 135 x 20mm	22/400/3
2. Premium Stainless Steel Dial Thermometer		-40 to +40°C only	72 x 62 x 40mm	22/402/2
3. Twin Reading Digital Thermometer		-50 to +70°C&F	63 x 63 x 15mm	22/420/3
4. Heavy Duty Thermometer	Magnet Fixing	-30 to +30°C&F	30 x 120 x 13mm	22/430/3
	Clip Fixing	-30 to +30°C&F	30 x 120 x 19mm	22/450/3
5. Twin Hanging Thermometers with zones		Freezer: -30 to -18°C / Fridge: +0.5 to +5°C	142 x 18 x 6mm x 2pcs	22/440/2
6. Maximum Recording Fridge Guard		-30 to +30°C only	130 x 40 x 22mm	22/482/2
7. Dial Thermometer	Standard blue scale design	-30 to +30°C only	86 x 65 x 12mm	22/474/2
	Penguin design	-30 to +28°C only	86 x 65 x 12mm	22/475/2
8. Horizontal Thermometer	Standard blue scale design	-30 to +40°C only	130 x 40 x 22mm	22/483/2
	Penguin design*	-30 to +40°C only	130 x 40 x 22mm	22/485/2
	Polar Bear design*	-30 to +40°C only	130 x 40 x 22mm	22/486/2
	Ice-cream Sundae design*	-30 to +40°C only	130 x 40 x 22mm	22/488/2
	Pack of 6 mixed designs (2pcs each*)	-30 to +40°C only	130 x 40 x 22mm x 6pcs	22/489/2
9. Energy Save Thermometer		-30 to +40°C only	130 x 40 x 22mm	22/494/2
10. Vertical Thermometer		-30 to +40°C only	142 x 18 x 6mm	22/491/2

Refrigeration - Temperature Log Book Kits

New

To minimise the risk of bacteria multiplying on food, it should be stored and prepared at the correct temperature.
To comply with current legislation, the **Brannan** temperature log book has been produced to assist with the requirement for a documented food safety management system.
Each kit comprises of a choice of horizontal, vertical or electronic thermometer and log book supplied in a polypropylene wallet which can be fixed to the corresponding equipment, avoiding confusion in areas where more than one log book is being used.
Each log book will enable you to record daily temperatures over a six month period.

- Each page represents a full week with up to four temperature readings taken and recorded each day.
- The location, type of equipment being used and the date and/or week number of use can be entered at the top of each page.
- The monitor can complete the record sheet by noting the time and temperature and add other relevant comments.

Replacement Log Books can be supplied as required.

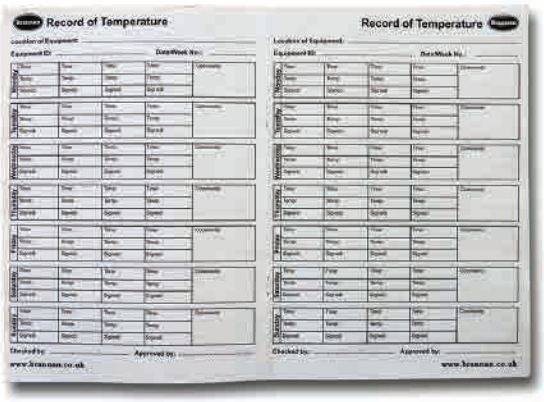

1. Temperature Log Book Kit with Horizontal Fridge or Freezer Thermometer

Clear front horizontal thermometer with blue printed scale on white moulding and clear zones indicating recommended temperature for fridge and freezer. Stainless steel clips for fixture to appliance.

Log Book Kit: 22/495/3

(See product 22/450/3 for details of the thermometer included in this kit)

2. Temperature Log Book Kit with Vertical Hanging Fridge or Freezer Thermometer

Vertical thermometer for hanging off fridge or freezer shelf. Moulded in durable white plastic with clear zones indicating temperatures for safe food storage.

Log Book Kit: 22/496/3

(See product 22/491/2 for details of the thermometer included in this kit)

Traceable Calibration Available

Statement of Conformity Available

3. Temperature Log Book Kit with Digital Fridge or Freezer and Room Thermometer

Thermometer with max/min feature and high/low alarm settings. Ideally suited to read temperature in a fridge or freezer or outdoor and room temperature simultaneously. Magnet attachment 20mm probe and 2m probe cable.
UKAS Calibration is available on external probe, if required.

Log Book Kit: 22/497/3

(See product 22/420/3 for details of the thermometer included in this kit)

UKAS Calibration Available

Log Book Kit Description	Thermometer Range	Product Dimensions	Product Number
1. Log Book Kit with Horizontal Thermometer	-30 to +30°C&F	203 x 100 x 30mm	**22/495/3**
2. Log Book Kit with Vertical Thermometer	-30 to +40°C only	203 x 100 x 30mm	**22/496/2**
3. Log Book Kit with Digital Thermometer	-50 to +70°C&F	203 x 100 x 35mm	**22/497/3**
4. Replacement Log Book	n/a	210 x 148 x 3mm	**13/090/0**

Refrigeration - Cold Room Storage and Wine & Beer

Low Range Room Thermometer
240mm wall thermometer ideal for outdoor uses in cold climate conditions or in cold storage rooms. Moulded in white plastic with clear black print. This thermometer is ideally suited for customers own branding or design.
Range: -40 to +50°C&F
Dimensions: 240 x 65 x 8mm
14/810/3

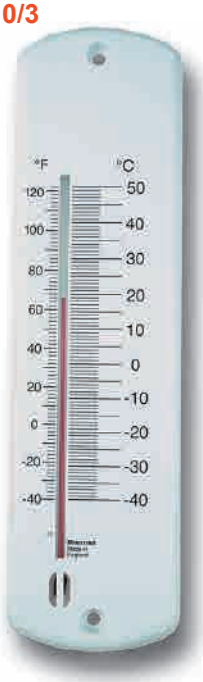

Traceable Calibration Available

Statement of Conformity Available

Wooden Cold Room Thermometer
Wooden flat stick refrigerator/cold room thermometer for use in walk-in fridge/ freezer or cold storage rooms.
Range: -30 to +40°C&F
Dimensions: 275 x 28 x 8mm
22/365/3

Cold Room Thermometer
240mm wall thermometer for use in walk-in fridge/freezer or cold storage rooms. Moulded in white plastic with clear black print. This thermometer is ideally suited for customers own branding or design.
Range: -40 to +50°C&F
Dimensions: 240 x 65 x 8mm
22/375/3

Cellar Thermometer
It is important that your cellar is kept at a constant temperature. This thermometer is suitable for use during storage of beers and wines with clearly marked zone on scale to indicate recommended storage temperatures. This thermometer is ideally suited for customers own branding or design.
Range: -10 to +50°C&F
Dimensions: 240 x 65 x 8mm
14/705/3

Wine and Beer Thermometers
200mm thermometer for wine and beer making.
Range: -5 to +105°C&F
Dimensions: 215 x 20mm diameter
21/594/3

Wine and Beer Hydrometer
Measuring the specific gravity of wine and beer and designed for home use, this hydrometer will monitor the fermentation process and allows the percentage of alcohol to be determined easily with a zoned scale.
Range: 0.98 to 1.12°SG
Dimensions: 230 x 19mm diameter
10/801/0

Wine Design Thermometers
Choice of two 240mm wall thermometers with attractive wine design.
Range: -10 to +50°C&F
Dimensions: 240 x 65 x 8mm
White Wine Design: 14/450/3
Red Wine Design: 14/451/3

Standard Wall Thermometers

The following pages illustrate the **Brannan** range of wall thermomers, all having clear markings and are suitable for indoor or outdoor use, in the home or garden. These thermometers are ideally suited for customers own branding or design and can be printed in customers own choice of colour (MOQ apply).
Certificate traceable to Recognised National Standard or Statement of Conformity, can be supplied if required.

145mm Plastic Wall Thermometer

Our best selling wall thermometer. 145mm white plastic moulding with black temperature scale. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 145 x 35 x 7mm
14/436/2 (°C only)
14/436/3 (°C&F)

Traceable Calibration Available

Statement of Conformity Available

240mm Plastic Wall Thermometer

240mm white plastic wall thermometer moulding with blue temperature scale. Large print area ideally suited for more detailed customer logos or designs.
Range: -20 to +50°C&F
Dimensions: 240 x 65 x 8mm
14/440/2 (°C only)
14/440/3 (°C&F)

215mm Plastic Wall Thermometer

Popular 215mm wall thermometer. White plastic moulding with black temperature scale. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 215 x 40 x 8mm
14/435/2 (°C only)
14/435/3 (°C&F)

150mm Plastic Wall Thermometer

Red and blue printed thermometer on white moulding.
Range: -20 to +50°C&F
Dimensions: 150 x 35 x 7mm
14/438/3 (°C&F)

380mm Plastic Wall Thermometer

380mm white plastic wall thermometer with black temperature scale suitable for use in the garden or home. Ideally suited for customers own branding or design.
Range: -20 to +50°C&F
Dimensions: 380 x 75 x 10mm
14/433/2 (°C only)
14/433/3 (°C&F)

Personalised Products

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork.
Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design. Customer branded packaging can also be arranged to complete the look of your products.
Please contact our Sales Team for details. (MOQ apply.)

Illustrated Wall Thermometers

The following items are **Brannan** range of colourful wall thermometers. Other designs and company branding are available through our full design service.

Traceable Calibration Available

Statement of Conformity Available

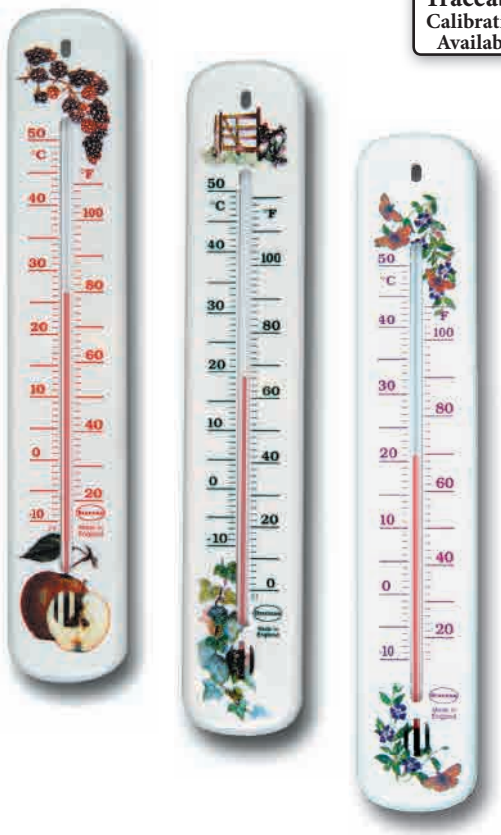

Decorative 380mm Wall Thermometers

Large wall thermometer with decorative orange print and flower design. Suitable for indoor or outdoor use.
Range: -20 to +50°C&F
Dimensions: 380 x 75 x 10mm
14/480/3

Decorative 215mm Wall Thermometers

Choice of three wall thermometers with individual designs and matching scale print.
Also available as pack of six thermometers (two of each designs).
Range: -20 to +50°C&F
Dimensions: 215 x 40 x 8mm
Wild Fruit Design - 14/460/3
Country Gate Design - 14/461/3
Butterfly Design - 14/462/3
Pack of 6 - 14/463/3

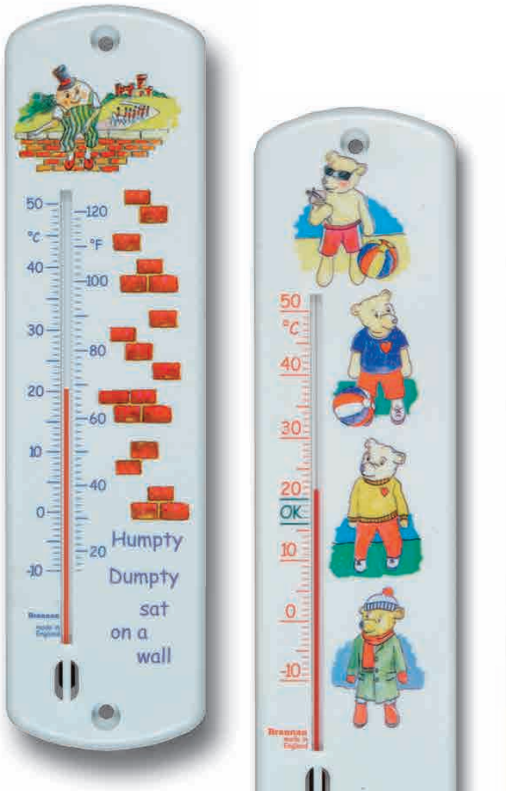

240mm Nursery Wall Thermometers

Babies and young children are particularly susceptible to fluctuations in temperature and it is therefore important to maintain a balanced environment for them.
This choice of three wall thermometers with individual designs help carers check and control bedroom and nursery temperatures.
Also available as pack of six (two of each designs).
Range: -10 to +50°C&F / °C only
Dimensions: 240 x 65 x 8mm
Humpty Dumpty - 14/470/3
Teddy Bear - 14/472/2
Giraffe & Bear - 14/474/2
Pack of 6 - 14/473/3

Environment Monitoring Wall Thermometers

The elderly, babies and young children are particularly susceptible to fluctuations in temperature. It is therefore important to maintain a balanced environment for them. **Brannan** offer a range of room thermometers which all have highly visible, easy to read zones to help determine the most comfortable and economical temperature settings for your home. Certificate traceable to Recognised National Standard or Statement of Conformity, can be supplied if required.
These thermometers are ideally suited for customers own branding or design (MOQ apply).

Traceable Calibration Available

Statement of Conformity Available

150mm Hypothermia Wall Thermometer

Short wall hypothermia thermometer with zones to help determine the most comfortable and economical temperature settings for your home.
Range: -20 to +50°C only
Dimensions: 145 x 34 x 7mm
14/862/2

215mm Hypothermia Wall Thermometer

Long wall hypothermia thermometer with zones to help determine the most comfortable and economical temperature settings for your home.
Range: -20 to +50°C only
Dimensions: 215 x 40 x 8mm
14/866/2

See full range of hypothermia thermometers in the Medical and Healthcare section of this catalogue.

240mm Hypothermia Wall Thermometer

Large Wall thermometer with zones indicating the most comfortable and economical temperature settings for your room.
Range: -20 to +50°C only
Dimensions: 240 x 65 x 8mm
14/867/2

New

Wall Thermometers with Energy Saving Tips

Choice of 145mm, 215mm or 240mm wall thermometer with energy saving tips for your home. Ideally suited for customers own branding or design.
Range: -20 to +50°C only
145 x 34 x 7mm - **14/875/2**
215 x 40 x 8mm - **14/876/2**
240 x 65 x 8mm - **14/877/2**

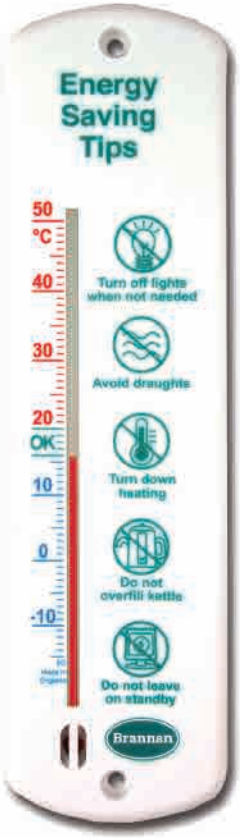

240mm Nursery Wall Thermometers

Wall thermometers with fun design help carers check and control bedroom and nursery temperature.
Range: -10 to +50°C only
Dimensions: 240 x 65 x 8mm
14/474/2

See full range of nursery wall thermometers on previous page of this catalogue.

Wood and Two Piece Wall Thermometers

Wooden Wall Thermometers

Choice of wooden wall thermometers; light wood with brass scale plate, standard short thermometer with blue printed scale or long wooden thermometer with black scale. Certificate traceable to Recognised National Standard or Statement of Conformity, can be supplied with these thermometers if required.

Wood & Brass Wall Thermometer

Wooden backed thermometer with brass temperature scale plate. Complete with hanging hook for wall mounting.
Range: -10 to +50°C&F
Dimensions: 180 x 38 x 9mm
14/402/3 (°C&F)

Short Wooden Wall Thermometer

Wooden wall thermometer with blue printed scale. Hanging hole on back of thermometer for hanging off wall.
Range: -20 to +50°C&F
Dimensions: 145 x 35 x 7mm
14/431/2 (°C only)
14/431/3 (°C&F)

Long Wooden Wall Thermometer

Wood wall thermometer with black printed scale. Hole on back of thermometer for hanging off wall.
Range: -20 to +50°C&F
Dimensions: 205 x 45 x 10mm
14/432/2 (°C only)
14/432/3 (°C&F)

Traceable Calibration Available

Statement of Conformity Available

Long, Two Piece Wall Thermometer

Blue print on white temperature scale plate with burgundy frame.
Range: -20 to +50°C&F
Dimensions: 205 x 40 x 12mm
14/441/3 (°C&F)

Two Piece Wall Thermometers

Attractive, long or short two piece wall thermometers with contrasting frames. Certificate traceable to Recognised National Standard or Statement of Conformity, can be supplied with these thermometers if required.

Short, Two Piece Wall Thermometer

Short wall thermometers with blue print on white scale plate and blue frame.
Range: -10 to +50°C&F
Dimensions: 150 x 44 x 12mm
14/442/3 (°C&F)

Short, Two Piece Wall Thermometer

Short wall thermometer with black print on cream scale plate with wood effect frame.
Range: -10 to +50°C&F
Dimensions: 150 x 44 x 12mm
14/614/3 (°C&F)

Digital Wall Thermometers

The following is our range of electronic max/min instruments suitable for indoor or outdoor use. All these thermometers have hanging hook for wall mounting. The instruments are supplied complete with battery and full instructions and can be supplied with certificate traceable to Recognised National Standard, if required. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

Traceable Calibration Available

Statement of Conformity Available

CE RoHS WEEE Compliant

1. Outdoor Electronic Max/Min Thermometer
Grey and white case with large splashproof display for outdoor or indoor use.
Range: -40 to +70°C
Dimensions: 115 x 75 x 44mm
LCD Dimensions: 38 x 40mm
12/424/3

BEST SELLERS

2. Large Electronic Max/Min Thermometers
Robust digital max/min thermometers suitable for outdoor or indoor use in choice of white or green moulding. Triple display shows minimum, maximum and current temperature simultaneously.
Range: -10 to +50°C
Dimensions: 160 x 78 x 31mm
LCD Dimensions: 79 x 60mm
White - 12/426/3
Green - 12/427/3

3. Electronic Max/Min Thermometer with Roof
Attractive max/min thermometer with roof suitable for outdoor or indoor use. Triple display shows minimum, maximum and current temperature simultaneously.
Range: -10 to +50°C
Dimensions: 150 x 50 x 29mm
LCD Dimensions: 47 x 39mm
12/428/3

New

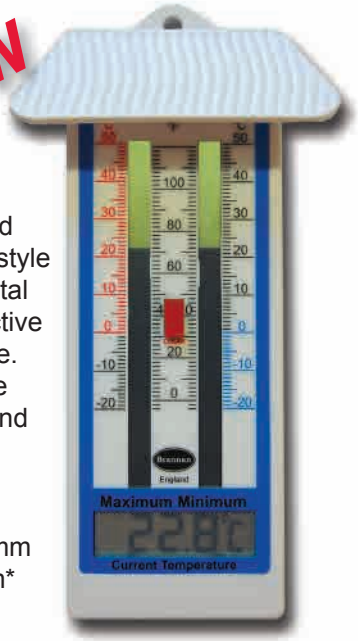

4. Classic Design Max/Min Thermometers with Roof
Digital thermometer modelled on traditional liquid-in-glass style max/min design but with digital display. Moulding has protective roof for outdoor or indoor use. Displays current temperature at same time as maximum and minimum temperature since last reset.
Range: -20 to +50°C
Dimensions: 203 x 100 x 30mm
LCD Dimensions: 16 x 52mm*
12/429/3
*current temperature LCD

Thermometer Description	Range	LCD Dimensions	Product Dimensions	Product Number
1. Outdoor Max/Min Thermometer	-40 to +70°C&F	38 x 40mm	115 x 75 x 44mm	**12/424/3**
2. Large Max/Min Thermometer - White	-10 to +50°C&F	79 x 60mm	160 x 78 x 31mm	**12/426/3**
2. Large Max/Min Thermometer - Green	-10 to +50°C&F	79 x 60mm	160 x 78 x 31mm	**12/427/3**
3. Max/Min Thermometer with Roof	-10 to +50°C&F	47 x 39mm	150 x 80 x 29mm	**12/428/3**
4. Classic Design Max/Min Thermometer	-20 to +50°C&F	16 x 52mm	203 x 100 x 30mm	**12/429/3**

Clocks are supplied with battery and are CE, WEEE and RoHS compliant.
All instruments can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity, if required.

CE RoHS
WEEE
Compliant

Traceable
Calibration
Available

Statement of
Conformity
Available

Wall Clock with Thermometer & Hygrometer
Large wall clock with inset temperature and humidity dials. Black print on white background provides clear display which make this instrument ideally suitable for use in a variety of locations including schools, workplace and home.
Range: -20 to +50°C&F / 0 to 100%RH
Dimensions: 330 x 280 x 40mm
28/600/0

Wall Clock
Large clock moulded in white plastic with clear black printed face.
Dimensions: 270mm diameter x 45mm
28/601/0

Also available as pack of two with matching thermometer/humidity meter (see 28/602/0 on page 29).
Pack of two wall dials - 28/603/0

Dial Instruments

The **Brannan** range of dial thermometers and hygrometers are suitable for the home, workplace or school. These instruments can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity, if required.

Traceable Calibration Available

Statement of Conformity Available

Gilt Dial Max/Min Thermometer

Attractive dial max/min thermometer with hygrometer.
Black plastic case and red and blue max/min indicators.
Range: -20 to +50°C&F / 0 to 100%RH
Dimensions: 100mm diameter x 40mm
12/413/3

Gilt Dial Barometer

Attractive dial barometer with black plastic case and pointer.
Range: 940 to 1060 hPa
72 to 80 mm/Hg
Dimensions: 80mm diameter x 35mm
28/009/0

Gilt Dial Thermometer & Hygrometer

100mm gilt dial with temperature and humidity scales printed in black.
Range: -20 to +50°C&F / 0 to 100%RH
Dimensions: 100mm diameter x 27mm
30/407/3

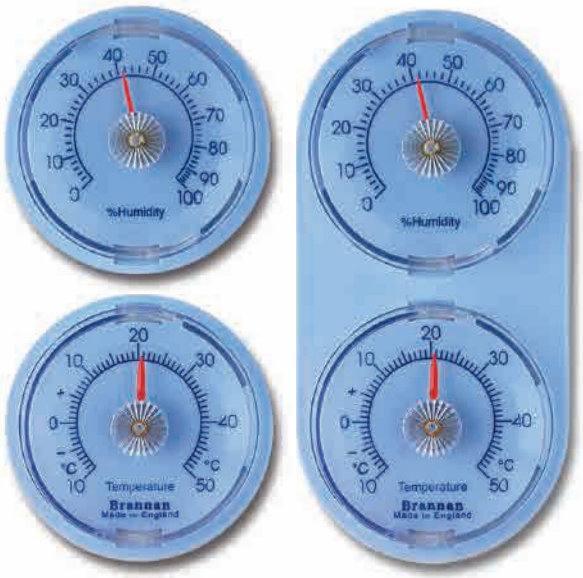

Mini Dial Thermometer & Hygrometers

Slate blue dial instruments with dark blue scales and red pointers. Thermometer, hygrometer and twin thermometer and hygrometer available. Particularly suited to customer own branding.
Range: -10 to +50°C only or °C&F
0 to 100%RH

Mini Dial Description	Range	Product Dimensions	Product Number
1. Thermometer	-10 to +50°C only	65 x 65 x 10mm	**30/408/2**
	-10 to +50°C&F	65 x 65 x 10mm	**30/408/3**
2. Hygrometer	0 to 100%RH	65 x 65 x 10mm	**30/411/0**
3. Twin Thermometer & Hygrometer	°C only and %RH	130 x 65 x 10mm	**30/412/2**
	°C&F and %RH	130 x 65 x 10mm	**30/412/3**

Thermometer Fridge Magnets

65mm white dial thermometers with magnet back for attaching to fridge door and hook for hanging off shelf. Choice of two attractive designs. Particularly suited to customer own branding or illustration.
Range: -10 to +50°C only
Dimensions: 85 x 65 x 12mm
Cricketer Bear Design - 30/420/2
Sundae Design - 30/421/2

Personalised Products

Many of these dials are suitable for customer own branding or design. Personalise packaging can also be arranged. Please contact our Sales Team for details. (MOQ apply.)

Dial Instruments and Window Thermometers

Wall Thermometer & Hygrometer

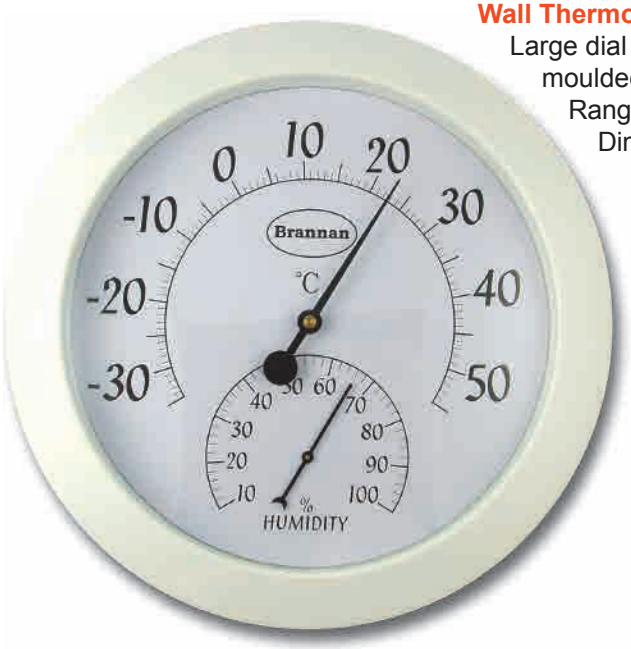

Large dial wall thermometer and humidity meter moulded in white plastic with clear black printed face.
Range: -30 to +50°C only / 10 to 100%RH
Dimensions: 270mm diameter x 45mm
28/602/0

Also available as pack of two with matching clock.
(see 28/601/0 on page 27)
Pack of two wall dials - 28/603/0

CE RoHS WEEE Compliant

Rainbow Patio Thermometer

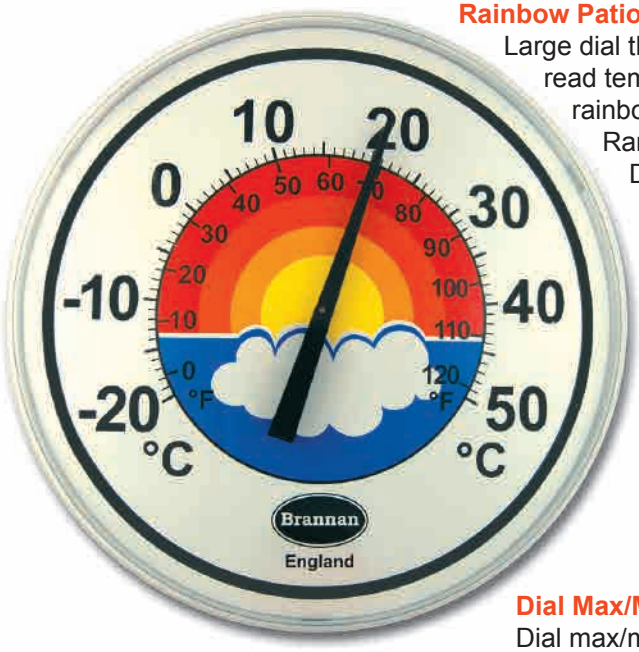

Large dial thermometer with easy to read temperature scale and decorative rainbow design.
Range:-20 to +50°C&F
Dimensions: 300mm diameter x 40mm
30/120/5

Traceable Calibration Available

Statement of Conformity Available

Dial Max/Min Thermometer

Dial max/min thermometer with coloured scale showing maximum and minimum temperatures reached as well as current temperature.
Range: -50 to +50°C&F
Dimensions: 93 x 123 x 34mm
12/450/3

Dial Window Thermometer

Dial thermometer with easy to read blue and red temperature zones. Fixes to outside of window to read outdoor temperature.
Range: -20 to +50°C&F
Dimensions: 85 x 65 x 10mm
14/419/3

Digital Window Thermometer

Digital window thermometer for measuring outdoor temperature. The suction pad fixes to the outside of your window or any flat surface. The display has large numbers for easy reading.
Range: -20 to +60°C only
Dimensions: 85 x 43 x 25mm
LCD Dimensions: 30 x 20mm
14/400/2

Indoor/Outoor Digital Weatherstations

Digital max/min thermometers to measure humidity and indoor and outdoor temperature. These thermometer can be supplied with certificate traceable to National Standards. External probes can be certified to UKAS Standards.
The instruments are supplied complete with battery and full instructions. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

CE RoHS
WEEE
Compliant

UKAS Calibration Available

Traceable Calibration Available

Statement of Conformity Available

1. Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures. Display can be switched from °C to °F and has max/min recording facilities.
Complete with stand and 2.5m cable for outdoor reading.
Temperature Range: -50 to +70°C&F
Dimensions: 98 x 74 x 17mm
LCD Dimensions: 35 x 52mm
12/412/3

2. Jumbo Max/Min Thermometer & Hygrometer

Twin displays to read indoor temperature and humidity or indoor and outdoor temperatures.
Complete with stand and 2m cable.
Temperature Range: -50 to +70°C&F
Humidity Range: 20 to 99%RH
Dimensions: 103 x 98 x 21mm
LCD Dimensions: 60 x 80mm
12/421/3

BEST SELLER

3. Wireless Indoor/Outdoor Thermometer & Hygrometer

Wireless unit with radio frequency for transmission and reception up to 30m. °C/F selectable, indoor/outdoor temperature at a glance with max/min temperature memory and hygrometer.
Temperature Range: -50 to +70°C&F
Hygrometer Range: 1 to 99%RH
Main Unit Dimensions: 121 x 72 x 24mm
Transmitter Dimensions: 100 x 70 x 22mm
LCD Dimensions: 35 x 40mm
12/425/3

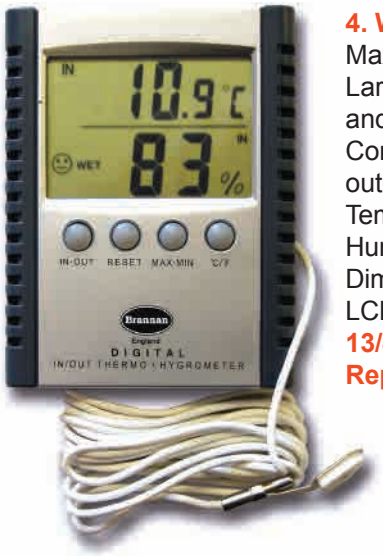

4. Weatherstation

BEST SELLER

Max/min thermometer with silvered front and black trim. Large display with simultaneous reading of temperature and humidity. Alarm functions on both temperature and humidity. Complete with stand or hook for wall hanging and 2m cable for outdoor probe.
Temperature Range: -20 to +70°C&F
Humidity Range: 20 to 99%RH
Dimensions: 98 x 74 x 17mm
LCD Dimensions: 35 x 52mm
13/420/3
Replacement Probe - 13/420/4

CE RoHS WEEE Compliant

5. Indoor/Outdoor Thermometer with Clock

Dual scale indoor/outdoor thermometer with max/min record function and clock. Complete with stand and 3m probe cable.
Temperature Range: -50 to +70°C&F
Dimensions: 51 x 72 x 19mm
LCD Dimensions: 13 x 32mm
14/437/3

BEST SELLER

6. Twin Reading Thermometer

Thermometer with max/min feature and high/low alarm settings. Reads outdoor and room temperature simultaneously and is also ideally suited to read room and fridge or freezer temperature. Magnet attachment with 20mm probe and 2m probe cable.
Temperature Range: -50 to +70°C&F
Dimensions: 63 x 63 x 15mm
LCD Dimensions: 21 x 47mm
22/420/3

New

7. Twin Reading Thermometer & Humidity Meter

Instrument to measure indoor and outdoor temperature and humidity. Max/min recording. Main body includes magnet, clip and stand. 2 x 1m cables.
Temperature Range: -50 to +70°C&F
Humidity Range: 10 to 95% RH
Dimensions: 63 x 63 x 22mm
LCD Dimensions: 22 x 40mm
22/425/3

Traceable Calibration Available

UKAS Calibration Available

Statement of Conformity Available

Weatherstation Description	Range		Max/Min Function	Cable Length	LCD Dimensions	Product Dimensions	Product Number
	Internal Reading	Remote Probe Reading					
1. Max/Min Indoor/Outdoor	0 to +50°C&F	-50 to +70°C&F	✓	2.5m	35 x 52mm	98 x 74 x 17mm	**12/412/3**
2. Jumbo Max/Min Thermometer & Hygrometer	-10 to +50°C&F & 20 to 99%RH	-50 to +70°C&F	✓	2.0m	60 x 80mm	103 x 98 x 21mm	**12/421/3**
3. Wireless Weatherstation	-	-50 to +70°C&F & 1 to 99%RH	✓	2.5m	35 x 40mm	121 x 72 x 24mm & 100 x 70 x 22mm	**12/425/3**
4. Weatherstation	0 to +50°C&F & 20 to 99%RH	-20 to +70°C&F	✓	-	35 x 52mm	98 x 74 x 17mm	**13/420/3**
4. Replacement Probe	-	-	-	2.0m	-	-	**13/420/4**
5. Indoor/Outdoor	-50 to +70°C&F	-50 to +70°C&F	✓	3.0m	13 x 32mm	51 x 72 x 19mm	**14/437/3**
6. Twin Reading Thermometer	-20 to +50°C&F	-50 to +70°C&F	✓	2.0m	22 x 40mm	63 x 63 x 22mm	**22/420/3**
7. Twin Reading Thermometer & Humidity Meter	-10 to +50°C&F & 10 to 95%RH	-50 to +70°C&F & 10 to 95%RH	✓	1.0m	22 x 40mm	63 x 63 x 22mm	**22/425/3**

Family Healthcare Thermometers

Brannan offer an extensive range of healthcare thermometers for professional or personal use. The complete range can be seen in the Medical & Healthcare Section of this catalogue. The following are our popular, easy to use thermometers suitable for use in the home to give quick and clear readings. All our digital instruments are CE, WEEE and RoHS compliant and are supplied complete with instructions and batteries (where appropriate).

UKAS Calibration Available

Traceable Calibration Available

Statement of Conformity Available

BEST SELLER

1. Standard Oral Clinical Thermometer

Easy to use electronic thermometer suitable for all ages especially babies, young children and the elderly.
Rigid probe thermometer suitable for measurements taken orally, rectally, or axillary (under the arm).
Supplied in protective case.
Suitable for use with disposable probe covers (product number 11/066/0 - see details below).
Range: +32 to +42.9°C
Dimensions: 133 x 24 x 14mm
LCD Dimensions: 6 x 18mm
11/064/2

CE
RoHS
WEEE
Compliant

2. Flexi-head Oral Clinical Thermometer with Disposable Probe Covers

Advanced, waterproof, flexible probe clinical thermometer with high speed response reading and protective case. Suitable for measurements taken orally, rectally, or axillary (under the arm). Each thermometer is supplied with 25pcs disposable probe covers for hygenic use of thermometer. Replacement packs available (product number 11/066/0 - see details below).
Range: +32 to +44°C
Dimensions: 133 x 22 x 12mm
LCD Dimensions: 7 x 20mm
11/065/2

New

3. Disposable Probe Covers

Pack of 25pcs disposable probe covers for hygenic use of thermometer. Compatible with both models of **Brannan** clinical thermometers.
11/066/0

Description	Range	Product Dimensions	Product Number
1. Standard Clinical Thermometer	+32 to +42.9°C	133 x 24 x 14mm	**11/064/2**
2. Flexi-Head Clinical Thermometer	+32 to +44°C	133 x 22 x 12mm	**11/065/2**
3. Pack Disposable Probe Covers	n/a	130 x 50 x 30mm	**11/066/0**

Ovulation Kit

By taking your temperature in a controlled and consistent manner each morning and plotting the results on a chart, it is possible to follow the progress of your menstrual cycle.
Oral clinical thermometer supplied with book of recording charts and instructions for daily readings.
Dimensions: 210 x 150 x 15mm
11/020/3

NB - This is not a contraceptive device.
To interpret the results you must seek the advice of your doctor.

Body & Surface Temperature Infrared Thermometer

Non-contact and hygienic infrared thermometer designed to take the body temperature of a person regardless of room temperature. Ideally suited for use in schools, businesses or other environments where a large number of people are coming into contact with one another. Features include laser targetting, selectable body or surface temperature and switchable °C/°F readout, alarm value setting, trigger lock and data hold.

Memory Recall: 32 measurements
Body Temp Range: +32 to +42.5°C&F
Surface Temp Range: 0 to +60°C&F
Dimensions: 149 x 77 x 43mm
LCD Dimensions: 28 x 24mm

11/400/3

CE RoHS WEEE Compliant

Statement of Conformity Available

Traceable Calibration Available

BEST SELLER

Infrared Ear Thermometer

Easy to use electronic thermometer with digital display and memory of last 10 readings. Complete with protective bag and replacement probe covers for hygienic use of ear thermometer.

Range: +35.5 to +42°C&F
Dimensions: 140 x 70 x 90mm
LCD Dimensions: 10 x 20mm

11/420/3

Replacement Probe Covers (20pcs)

Boxed Dimensions: 76 x 32 x 30mm

11/421/0

Forehead Strip Temperature Indicator

This quick and safe forehead strip thermometer uses heat sensitive liquid encased in plastic film. Ideal for taking the temperature of small children. Comes complete with protective case and full instructions.

Range: +35 to +40°C&F
Dimensions: 39 x 99 x 10mm

11/465/3

New

Infrared Forehead Thermometer

Digital infrared forehead thermometer. Also suitable for measuring the temperature of milk.

Forehead Temp Mode Range: +32 to +42.2°C&F
Milk Temp Mode Range: 0 to +100°C&F
Dimensions: 143 x 60 x 50mm
LCD Dimensions: 33mm diameter

11/440/3

Family Healthcare Thermometers

Bath Water Thermometers

Brannan offer a range of bath thermometers to assist in obtaining the correct temperature of bath water, therefore avoiding the risk of scalding or chilling. This is invaluable for babies or elderly people.

Statement of Conformity Available

Traceable Calibration Available

1. Scoop Bath Thermometer

An alternative method of checking bath water temperature by sampling. Dual scale with zones indicating recommended temperatures.
Range: -25 to +50°C&F
Dimensions: 230 x 45 x 35mm
18/126/3

2. Horizontal Bath Thermometer

140mm white bath thermometer with zones showing recommended temperatures. This thermometer is ideally suited to customer own branding.
Range: -10 to +50°C&F
Dimensions: 140 x 25 x 10mm
18/132/3

3. Baby Bath & Food Thermometer

Pocket test thermometers supplied in protective cases for checking temperature of baby's bath or food. thermometer marked with zones to indicate safe temperature of water.
Dimensions: 160 x 20 x 16mm
18/348/3

Description	Range	Product Dimensions	Product Number
1. Scoop Bath Thermometer	-25 to +50°C&F	145 x 34 x 7mm	**18/126/3**
2. Horizontal Bath Thermometer	-10 to +50°C&F	140 x 25 x 10mm	**18/132/3**
3. Baby Bath & Food Thermometer	0 to +50°C&F	160 x 20 x 16mm	**18/132/3**

Personalised Products

These thermometers can be personalised to customers' own design, either by adding company logo or complete bespoke artwork.
Our state of the art printing process enables us to work with you to provide a unique product or a whole range of products to your own design. Customer branded packaging can also be arranged to complete the look of your products.
Please contact our Sales Team for details.
(MOQ apply.)



Timers & Counters

- Digital Timers
- Stopwatches
- Tally Counters
- Sand Timers

Brannan

Digital Timers

Single Count Timers

Wide range of timers which can be used in a variety of applications. The following timers are all single count timers. Double and triple count timers can be seen overleaf.
All models are supplied with batteries and operating instructions.
All electronic instruments are CE, WEEE and RoHS compliant.

1. Taxi Timer
99 minute, 59 second count-down and up timer modelled around fun taxi design. Desk standing or magnetic fixing.
Dimensions: 55 x 80 x 22mm
LCD Dimensions: 20 x 58mm
28/200/0

2. Fire Engine Timer
Fire engine design 99 minute, 59 second countdown and up timer. Desk standing or magnetic fixing.
Dimensions: 55 x 80 x 22mm
LCD Dimensions: 20 x 58mm
28/201/0

3. Heavy Duty Timer
99 minute, 59 second countdown and up timer switchable to 19 hour/59 minute. Complete with stand, clip and magnetic fixings.
Dimensions: 70 x 47 x 30mm
LCD Dimensions: 18 x 30mm
28/202/0

BEST SELLER

4. Large Timer
99 minute, 59 second count-down and up timer. With stand, clip, hanging hook and magnetic fixings.
Dimensions: 70 x 80 x 20mm
LCD Dimensions: 38 x 64mm
28/203/0

CE
RoHS
WEEE
Compliant

Traceable Calibration Available

Statement of Conformity Available

5. Numeric Setting Timer & Clock
9 hour, 59 minute, 59 second timer and clock. Countdown and up with memory function. 12/24 hour clock. With stand and magnetic fixings.
Dimensions: 65 x 75 x 25mm
LCD Dimensions: 20 x 60mm
28/204/0

BEST SELLER

7. Timer & Clock
99 minute, 59 second countdown and up timer with 12 hour clock, alarm and memory function. Complete with stand, hanger and magnetic fixings.
Dimensions: 66 x 76 x 20mm
LCD Dimensions: 20 x 48mm
28/210/0

6. Mini Timer
99 minute, 59 second countdown timer with memory function. Complete with stand, clip and magnetic fixings.
Dimensions: 55 x 55 x 25mm
LCD Dimensions: 12 x 27mm
28/205/0

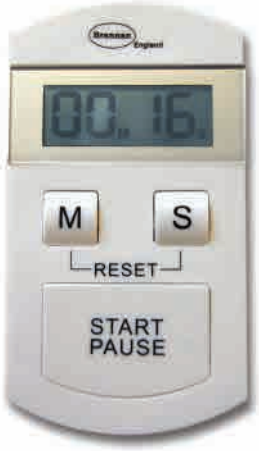

8. Slimline Timer
Easy to use 99 minute, 59 second count-down and up timer with magnetic fixing.
Dimensions: 88 x 48 x 18mm
LCD Dimensions: 12 x 34mm
28/213/0

CE
RoHS
WEEE
Compliant

Traceable Calibration Available

Statement of Conformity Available

9. Water Resistant Timer
Large water resistant and steam proof timer to IP64, with stand and suction cup. 99 minute, 59 second countdown timer.
Dimensions: 91 x 79 x 26mm
LCD Dimensions: 19.5 x 88mm
28/215/0

10. "Egg" Timer
Fun, egg design timer. 99 minute, 59 second countdown and up timer.
Dimensions: 70 x 55 x 55mm
LCD Dimensions: 13 x 28mm
28/216/0

New

11. Kitchen Timer
Easy to read countdown and up timer. 99 minute, 59 second count.
Dimensions: 67 x 79 x 17mm
LCD Dimensions: 22 x 40mm
28/217/0

New

12. Pocket Timer
Slimline countdown and up timer with large, clear display. 99 minute, 59 second count. This timer is particularly suited to customer branding.
Dimensions: 67 x 50 x 10mm
LCD Dimensions: 26 x 35mm
28/218/0

Timer Description	Count	Count Up & Down	Fixings	LCD Dimensions	Product Dimensions	Product Number
1. 'Taxi' Timer	99 min, 59 sec	✓	Desk top	20 x 58mm	55 x 80 x 22mm	**28/200/0**
2. 'Fire Engine' Timer	99 min, 59 sec	✓	Desk top	20 x 58mm	55 x 80 x 22mm	**28/201/0**
3. Heavy Duty Timer	99 min, 59 sec / 19 hr, 59 min	✓	Magnet & clip	18 x 30mm	70 x 47 x 30mm	**28/202/0**
4. Large Timer	99 min, 59 sec	✓	Magnet	38 x 64mm	70 x 80 x 20mm	**28/203/0**
5. Numeric Setting & Clock	9 hr, 59 min, 59 Sec	✓	Magnet	20 x 60mm	65 x 75 x 25mm	**28/204/0**
6. Mini Timer	99 Min, 59 Sec	Down only	Magnet & clip	12 x 27mm	55 x 55 x 25mm	**28/205/0**
7. Timer & Clock	99 min, 59 sec	✓	Hook & magnet	20 x 48mm	66 x 76 x 20mm	**28/210/0**
8. Slimline Timer	99 min, 59 sec	✓	Magnet	12 x 34mm	88 x 48 x 18mm	**28/213/0**
9. Water Resistant Timer	99 min, 59 sec	Down only	Suction cup	19.5 x 88mm	91 x 79 x 26mm	**28/215/0**
10. 'Egg' Timer	99 min, 59 sec	✓	Desk top	13 x 28mm	70 x 55 x 55mm	**28/216/0**
11. Kitchen Timer	99 min, 59 sec	✓	Magnet & stand	22 x 40mm	67 x 79 x 17mm	**28/217/0**
12. Pocket Timer	99 min, 59 sec	✓	Magnet	26 x 35mm	67 x 50 x 10mm	**28/218/0**

Digital Timers

Multi Count Timers

Wide range of multi count timers which can be used in a variety of applications. The following timers have double, triple or four-way counters. All models are supplied with batteries and operating instructions.
All electronic instruments are CE, WEEE and RoHS compliant.

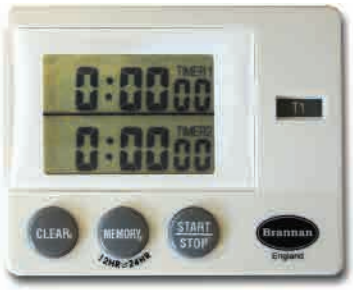

1. Dual Timer & Clock
23 hour, 59 minute, 59 second countdown and up dual timer with memory function and 12/24 hour clock.
With clip and magnetic fixings.
Dimensions: 53 x 68 x 14mm
LCD Dimensions: 24 x 35mm
28/206/0

BEST SELLER

2. Dual Timer & Clock
Two 24 hour countdown timers. 12/24 hour clock. Magnetic back clip and stand.
Dimensions: 50 x 60 x 12mm
LCD Dimensions: 12 x 32mm
28/211/0

3. Jumbo Dual Timer & Clock
Two x 24 hour clock and timer. Countdown and 20 hour count up timer with memory function. Bottom folds out to enable timer to stand unsupported. Also fitted with bracket for wall mounting.
Dimensions: 140 x 95 x 20mm
LCD Dimensions: 75 x 63mm
28/208/0

4. Triple Timer & Clock
Three x 20 hour countdown timers with clock and memory function.
Count up timer in 1/100 seconds.
12/24 hour clock.
Stand and magnetic fixings.
Dimensions: 86 x 56 x 22mm
LCD Dimensions: 45 x 40mm
28/207/0

5. Triple Timer & Clock
Three x 20 hour countdown and up timer and 12/24 hour clock. Stand and magnetic fixing.
Dimensions: 92 x 69 x 13mm
LCD Dimensions: 45 x 41mm
28/214/0

BEST SELLER

6. Four Way Timer & Clock
Four timers in one compact unit.
24 hour countdown and up.
12/24 hour clock.
Magnetic back clip and stand.
Dimensions: 62 x 75 x 15mm
LCD Dimensions: 22 x 50mm
28/212/0

CE
RoHS
WEEE
Compliant

Traceable Calibration Available

Statement of Conformity Available

Timer Description	Count	Count Up & Down	Fixings	LCD Dimensions	Product Dimensions	Product Number
1. Dual Timer & Clock	23 hr, 59 min, 59 sec	✓	Magnet & clip	24 x 35mm	53 x 68 x 14mm	**28/206/0**
2. Dual Timer & Clock	9 hr, 59 min, 59 sec	✓	Magnetic back clip	12 x 32mm	50 x 60 x 12mm	**28/211/0**
3. Jumbo Dual Timer & Clock	23 hr, 59 min, 59 sec	✓	Wall mountable	75 x 63mm	140 x 95 x 20mm	**28/208/0**
4. Triple Timer & Clock	23 hr, 59 min, 59 sec	✓	Magnet	45 x 40mm	86 x 56 x 22mm	**28/207/0**
5. Triple Timer & Clock	23 hr, 59 min, 59 sec	✓	Magnet	45 x 41mm	92 x 69 x 13mm	**28/214/0**
6. Four Way Timer & Clock	23 hr, 59 min, 59 sec	✓	Magnetic back clip	22 x 50mm	62 x 75 x 15mm	**28/212/0**

Stopwatches

Choice of three stopwatches. All models are supplied with batteries and operating instructions.
All electronic instruments are CE, WEEE and RoHS compliant.

1. Sports Stopwatch

1/100 second stopwatch with split counter, calendar, time and alarm. Complete with hanging cord.
Max Count: 99:99:99
Dimensions: 79 x 59 x 16mm
LCD Dimensions: 12 x 27mm
28/400/0

2. Water Resistant Stopwatch

1/100 second water resistant (1ATM) stopwatch with split counter, calendar, time and alarm. Complete with hanging cord.
Max Count: 99:99:99
Dimensions: 71 x 63 x 20mm
LCD Dimensions: 16 x 32mm
28/401/0

3. Standard Stopwatch

1/100 second stopwatch with split counter, calendar, time and alarm. Complete with hanging cord.
Max Count: 99:99:99
Dimensions: 66 x 52 x 17mm
LCD Dimensions: 9 x 21mm
28/402/0

Description	Max Count	LCD Dimensions	Product Dimensions	Product Number
1. Sports Stopwatch	99:99:99	12 x 27mm	79 x 59 x 16mm	**28/400/0**
2. Waterproof Stopwatch	99:99:99	16 x 32mm	71 x 63 x 20mm	**28/401/0**
3. Standard Stopwatch	99:99:99	9 x 21mm	66 x 52 x 17mm	**28/402/0**

Traceable Calibration Available

Statement of Conformity Available

CE RoHS WEEE Compliant

Tally Counters

1. Hand Held Analogue Tally Counter

Stainless steel tally counter with finger holder. Counts from 0 to 9999 in clear white numbers on black background. Resets by turning knob.
Dimensions: 48 x 54 x 37mm
Count Dimensions: 6 x 18mm
28/501/0

2. Desk Top Analogue Tally Counter

Stainless steel tally counter with metal stand which can be fixed securely to desk or table using the three screw holes. Counts from 0 to 9999 in clear white numbers on black background. Resets by turning knob.
Dimensions: 63 x 55.5 x 55.5mm
Count Dimensions: 6 x 18mm
28/502/0

1. Hand Held Digital Tally Counter

Digital tally counter with finger holder and robust plastic housing. Counts from 0 to 99999 on clear LCD. Push button reset.
Dimensions: 50 x 46 x 35mm
LCD Dimensions: 8 x 22mm
28/503/0

Description	Count	Analogue/ Digital	Reset	Reading Dimensions	Product Dimensions	Product Number
1. Hand Held Tally Counter	0 to 9999	Analogue	Knob turn	6 x 18mm	48 x 54 x 37mm	**28/501/0**
2. Desk Top Tally Counter	0 to 9999	Analogue	Knob turn	6 x 18mm	63 x 55.5 x 55.5mm	**28/502/0**
3. Hand Held Tally Counter	0 to 99999	Digital	Push button	8 x 22mm	50 x 46 x 22mm	**28/503/0**

Sand Timers

New

Introducing a range of sand timers with robust end caps and wall surrounds. Ideally suited to group or individual use for games, event timing or educational lessons such as mathematics or science.
The timers are colour coded for easy identification with a different colour for each timing, for example:
Green = 1 minute
Yellow = 3 minutes
Blue = 5 minutes

Small Sand Timers

Standard sized sand timers available in 1, 3 or 5 minute timings.
Standard Packs:
3 x 1 timing (3pcs each of 1, 3 *or* 5 mins)
10 x 1 timing (10pcs each of 1, 3 *or* 5 mins)
1 x 3 timings (1pc each of 1, 3 *and* 5 mins)
Dimensions: 90 x 25mm dia*

Jumbo Sand Timers

Large, fun sized sand timers available in eight different timings/colours. Available in single units.
Dimensions: 160 x 70mm dia
Timings: 30 secs, 1 min, 2 mins,
3 mins, 5 mins, 10 mins,
15 mins or 30 mins.

Description	Pack Size	Timing	Product Dimensions*	Product Number
Mixed Pack Small Sand Timers	3 pcs	1pc x 1, 3, & 5 mins	90 x 25mm dia	**28/700/0**
Small Sand Timers - Green	3 pcs	3pcs x 1 minute	90 x 25mm dia	**28/720/0**
Small Sand Timers - Yellow	3 pcs	3pcs x 3 minutes	90 x 25mm dia	**28/721/0**
Small Sand Timers - Blue	3 pcs	3pcs x 5 minutes	90 x 25mm dia	**28/722/0**
Small Sand Timers - Green	10 pcs	10pcs x 1 minute	90 x 25mm dia	**28/701/0**
Small Sand Timers - Yellow	10 pcs	10pcs x 3 minutes	90 x 25mm dia	**28/702/0**
Small Sand Timers - Blue	10 pcs	10pcs x 5 minutes	90 x 25mm dia	**28/703/0**
Jumbo Sand Timer - Red	1 pc	1pc x 30 seconds	160 x 70mm dia	**28/704/0**
Jumbo Sand Timer - Green	1 pc	1pc x 1 minute	160 x 70mm dia	**28/705/0**
Jumbo Sand Timer - Pink	1 pc	1pc x 2 minutes	160 x 70mm dia	**28/706/0**
Jumbo Sand Timer - Yellow	1 pc	1pc x 3 minutes	160 x 70mm dia	**28/707/0**
Jumbo Sand Timer - Blue	1 pc	1pc x 5 minutes	160 x 70mm dia	**28/708/0**
Jumbo Sand Timer - Orange	1 pc	1pc x 10 minutes	160 x 70mm dia	**28/709/0**
Jumbo Sand Timer - Purple	1 pc	1pc x 15 minutes	160 x 70mm dia	**28/710/0**
Jumbo Sand Timer - Black	1 pc	1pc x 30 minutes	160 x 70mm dia	**28/711/0**

* Product dimension is for single unit

Medical & Healthcare Range

- Personal Healthcare
- Environmental Monitoring
- Food Monitoring

Brannan

Personal Healthcare Instruments

Brannan offer an extensive range of healthcare thermometers for professional or personal use. The following products are our easy to use thermometers suitable for use in the home to give quick and clear readings. All our digital instruments are CE, WEEE and RoHS compliant and are supplied complete with instructions and batteries (where appropriate).

UKAS Calibration Available

Traceable Calibration Available

Statement of Conformity Available

1. Standard Oral Clinical Thermometer

BEST SELLER

Easy to use electronic thermometer suitable for all ages especially babies, young children and the elderly.
Rigid probe thermometer suitable for measurements taken orally, rectally, or axillary (under the arm).
Supplied in protective case.
Suitable for use with disposable probe covers (product number 11/066/0 - see details below).
Range: +32 to +42.9°C
Dimensions: 133 x 24 x 14mm
LCD Dimensions: 6 x 18mm
PIP Code: 261-0954
11/064/2

CE
RoHS
WEEE
Compliant

2. Flexi-head Oral Clinical Thermometer

Advanced, waterproof, flexible probe clinical thermometer with high speed response reading and protective case. Suitable for measurements taken orally, rectally, or axillary (under the arm).
Each thermometer is supplied with 25pcs disposable probe covers for hygenic use of thermometer. Replacement packs available (product number 11/066/0 - see details below).
Range: +32 to +44°C
Dimensions: 133 x 22 x 12mm
LCD Dimensions: 7 x 20mm
PIP Code: 368-7472
11/065/2

New

3. Disposable Probe Covers

Pack of 25pcs disposable probe covers for hygenic use of thermometer. Compatible with both models of **Brannan** clinical thermometers.
PIP Code: 401-9303
11/066/0

Description	Range	Product Dimensions	Product Number
1. Standard Clinical Thermometer	+32 to +42.9°C	133 x 24 x 14mm	**11/064/2**
2. Flexi-Head Clinical Thermometer	+32 to +44°C	133 x 22 x 12mm	**11/065/2**
3. Pack Disposable Probe Covers	n/a	130 x 50 x 30mm	**11/066/0**

Ovulation Kit

By taking your temperature in a controlled and consistent manner each morning and plotting the results on a chart, it is possible to follow the progress of your menstrual cycle.
Oral clinical thermometer supplied with book of recording charts and instructions for daily readings.
Dimensions: 210 x 150 x 15mm
Pip Code: 032-6850
11/020/3

NB - This is not a contraceptive device.
To interpret the results you must seek the advice of your doctor.

Advanced Body & Surface Temperature Infrared Thermometer

Non-contact and hygienic infrared thermometer designed to take the body temperature of a person regardless of room temperature. Ideally suited for use in schools, businesses or other environments where a large number of people are coming into contact with one another. Features include laser targetting, selectable body or surface temperature and switchable °C/°F readout, alarm value setting, trigger lock and data hold.

Memory Recall: 32 measurements
Body Temp Range: +32 to +42.5°C&F
Surface Temp Range: 0 to +60°C&F
Dimensions: 149 x 77 x 43mm
LCD Dimensions: 28 x 24mm
Pip Code: 347-3733
11/400/3

CE RoHS WEEE Compliant

Statement of Conformity Available

Traceable Calibration Available

BEST SELLER

Infrared Ear Thermometer

Easy to use electronic thermometer with digital display and memory of last 10 readings. Complete with protective bag and replacement probe covers for hygienic use of ear thermometer.

Range: +35.5 to +42°C&F
Dimensions: 140 x 70 x 90mm
LCD Dimensions: 10 x 20mm
Pip Code: 289-2305
11/420/3

Replacement Probe Covers (20pcs)

Boxed Dimensions: 76 x 32 x 30mm
Pip Code: 329-4303
11/421/0

Forehead Strip Temperature Indicator

This quick and safe forehead strip thermometer uses heat sensitive liquid encased in plastic film. Ideal for taking the temperature of small children. Comes complete with protective case and full instructions.

Range: +35 to +40°C&F
Dimensions: 39 x 99 x 10mm
PIP Code: 047-6143
11/465/3

New

Infrared Forehead Thermometer

Digital infrared forehead thermometer. Also suitable for measuring the temperature of milk.

Forehead Temp Mode Range: +32 to +42.2°C&F
Milk Temp Mode Range: 0 to +100°C&F
Accuracy*: +/-0.2°C
Dimensions: 143 x 60 x 50mm
LCD Dimensions: 33mm diameter
Pip Code: 319-6656
11/440/3

Environment Monitoring

Room Thermometers

Babies, young children and the elderly are particularly susceptible to fluctuations in temperature. It is therefore important to maintain a balanced environment for them. These thermometers can be supplied with a Certificate of Conformity or a Calibration Certificate traceable to National Standards.

Quick Set Push Button Max/Min

This popular max/min thermometer features a press button for quick reset. White plastic moulding with blue temperature scale and reset button. Hanging hook on top of instrument.
Other max/min designs availble. Please see page 10/11 of this catalogue.
Range: -35 to +50°C&F
Dimensions: 205 x 55 x 27mm
Pip Code: 320-1795
12/408/3 °C&F

Traceable Calibration Available

Statement of Conformity Available

Nursery Wall Thermometer

240mm wall thermometers with fun design to help check and control bedroom and nursery temperatures.
Other nursery designs availble. Please see page 23 of this catalogue.
Range: -10 to +50°C only
Dimensions: 240 x 65 x 8mm
Pip Code: 320-1837
14/472/2

Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures. Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for outdoor reading. UKAS calibration available on external probe if required.
Indoor Range: 0 to +50°C&F
Outdoor Range: -50 to +70°C&F
Dimensions: 98 x 74 x 17mm
LCD Dimensions: 35 x 52mm
Pip Code: 320-1803
12/412/3

CE
RoHS
WEEE
Compliant

New

Energy Save Wall Thermometer

A unique wall thermometer with energy saving tips for your home. Ideally suited for customers own branding or design. Also available in 215mm or 240mm lengths. Please see page 24 of this catalogue.
Range: -20 to +50°C only
Dimensions: 145 x 34 x 7mm
PIP Code: 401-9642
14/875/2

Timer & Clock

99 minute, 59 second countdown and up timer with 12 hour clock, alarm and memory function. Complete with stand, hanger and magnetic fixings.
Dimensions: 66 x 76 x 20mm
LCD Dimensions: 20 x 48mm
Pip Code: 320-1845
28/210/0

Personalised Products

Many of our thermometers and other instruments can be personalised to customers' own design, either by adding company logo or complete bespoke artwork.
Please contact our Sales Team for details. (MOQ apply.)

Hypothermia Room Thermometers

Elderly people are particularly susceptible to cold environments. With this in mind **Brannan** have developed a range of unique hypothermia thermometers which all have highly visible, simple to read zones to help determine the most comfortable and economical temperature settings in the home. These thermometers are ideally suited for customers own branding or design.

1. Hanging Dial Hypothermia Thermometer

65mm white dial with hook for hanging off shelf. Large zones for easy reading.
Range: -10 to +50°C only
Dimensions: 85 x 65 x 12mm
Pip Code: 401-9311
14/868/2



2. Carded Dial Hypothermia Thermometer

65mm white dial on pyramid card which can stand on a shelf or mantlepiece. Extended, highly visible zones makes this design particularly easy to read. Features Fahrenheit scale however Celsius or dual scale is available on application.
Range: +20 to +120°F only
Dimensions: 150 x 150 x 80mm
Pip Code: 320-1829
14/865/2

3. 150mm Hypothermia Wall Thermometer

Short wall thermometer with zones indicating the most comfortable and economical temperature settings for your room.
Range: -20 to +50°C only
Dimensions: 145 x 34 x 7mm
Pip Code: 261-0996
14/862/2

4. 215mm Hypothermia Wall Thermometer

Wall thermometer with zones indicating the most comfortable and economical temperature settings for your room.
Range: -20 to +50°C only
Dimensions: 215 x 40 x 8mm
Pip Code: 401-9329
14/866/2

5. 240mm Hypothermia Wall Thermometer

Large Wall thermometer with zones indicating the most comfortable and economical temperature
settings for your room.
Range: -20 to +50°C only
Dimensions: 240 x 65 x 8mm
PIP Code: 401-9584
14/867/2

Traceable Calibration Available

Statement of Conformity Available

Description	Range	Product Dimensions	PIP Code	Product Number
1. Hanging Dial Thermometer	-10 to +50°C only	85 x 65 x 12mm	401-9311	**14/868/2**
2. Carded Hanging Dial Thermometer	+20 to +120°F only	150 x 150 x 80mm	320-1829	**14/865/3**
3. 150mm Wall Thermometer	-20 to +50°C only	145 x 34 x 7mm	261-0996	**14/862/2**
4. 215mm Wall Thermometer	-20 to +50°C only	215 x 40 x 8mm	401-9329	**14/866/2**
5. 240mm Wall Thermometer	-20 to +50°C only	240 x 65 x 8mm	401-9584	**14/867/2**

Food Monitoring

The following instruments assist in the preparation and safe storage of food to minimise the risk of harmful contamination. These thermometers can be supplied with a Certificate of Conformity or a Calibration Certificate traceable to National Standards.

Statement of Conformity Available

Traceable Calibration Available

Digital Fridge or Freezer Thermometer

Electronic thermometer which displays fridge or freezer and room temperature to assist with safe food storage in your appliance. Alarm feature and 1m cable with suction pad. UKAS calibration available on external probe if required.
Range: -50 to +70°C&F
Dimensions: 25 x 135 x 20mm
LCD Dimensions: 12 x 58mm
PIP Code: 401-9592
22/400/3

CE RoHS WEEE Compliant

BEST SELLER

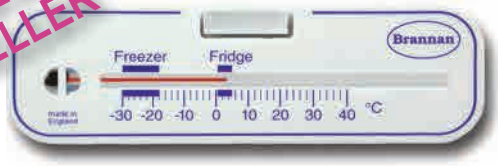

Horizontal Fridge or Freezer Thermometer

130mm white horizontal thermometer with blue temperature scale and zones indicating temperatures for safe food storage.
Range: -30 to +40°C only
Dimensions: 130 x 40 x 22mm
Pip Code: 033-1462
22/483/2

Dial Fridge or Freezer Thermometer

White dial thermometer with zones to indicate recommended temperatures for your appliance.
Range: -30 to +30°C only
Dimensions: 85 x 65 x 12mm
Pip Code: 033-1850
22/475/2

UKAS Calibration Available

Waterproof Test Thermometer

Waterproof thermometer to IP65. With max/min memory, hold functions and 120mm stainless steel probe. Suitable for use with food preparation. Supplied with pocket case and clip.
Range: -40 to 240°C&F
Dimensions: 200 x 20 x 15mm
LCD Dimensions: 7 x 17mm
Pip Code: 401-9337
31/162/0

BEST SELLER

Vertical Hanging Fridge or Freezer Thermometer

Vertical thermometer for hanging off fridge or freezer shelf. Moulded in durable white plastic with clear zones indicating temperatures for safe food storage.
Range: -30 to +40°C only
Dimensions: 142 x 18 x 6mm
Pip Code: 261-0913
22/491/2

Baby Food & Bath Thermometer

Pocket test thermometers supplied in protective cases for checking temperature of baby's food or bath. thermometer marked with zones to indicate safe temperature of water.
Dimensions: 160 x 20 x 16mm
Pip Code: 032-6942
18/348/3

Personalised Products

Many of our thermometers can be personalised to customers' own design, either by adding company logo or complete bespoke artwork.
Please contact our Sales Team for details. (MOQ apply.)

Temperature Log Book and Thermometer Kit

New

To minimise the risk of bacteria multiplying on food, it should be stored and prepared at the correct temperature.
To comply with current legislation, the **Brannan** temperature log book has been produced to assist with the requirement for a documented food safety management system.
Each kit comprises of a choice of horizontal, vertical or electronic thermometer and log book supplied in a polypropylene wallet which can be fixed to the corresponding equipment, avoiding confusion in areas where more than one log book is being used.
Each log book will enable you to record daily temperatures over a six month period.

- Each page represents a full week with up to four temperature readings taken and recorded each day.
- The location, type of equipment being used and the date and/or week number of use can be entered at the top of each page.
- The monitor can complete the record sheet by noting the time and temperature and add other relevant comments.

Replacement Log Books can be supplied as required.

Statement of Conformity Available

Traceable Calibration Available

1. Temperature Log Book Kit with Horizontal Fridge or Freezer Thermometer

Clear front horizontal thermometer with blue printed scale on white moulding and clear zones indicating recommended temperature for fridge and freezer.
Stainless steel clips for fixture to appliance.
PIP Code: 401-9600
Log Book Kit: 22/495/3
(See product 22/450/3 for details of the thermometer included in this kit)

2. Temperature Log Book Kit with Vertical Hanging Fridge or Freezer Thermometer

Vertical thermometer for hanging off fridge or freezer shelf. Moulded in durable white plastic with clear zones indicating temperatures for safe food storage.
PIP Code: 401-9618
Log Book Kit: 22/496/3
(See product 22/491/2 for details of the thermometer included in this kit)

3. Temperature Log Book Kit with Digital Fridge or Freezer and Room Thermometer

Thermometer with max/min feature and high/low alarm settings. Ideally suited to read temperature in a fridge or freezer or outdoor and room temperature simultaneously.
Magnet attachment 20mm probe and 2m probe cable.
UKAS calibration available on external probe if required.
PIP Code: 401-9626
Log Book Kit: 22/497/3
(See product 22/420/3 for details of the thermometer included in this kit)

CE
RoHS
WEEE
Compliant

4. Replacement Log Books

PIP Code: 401-9634
Log Book: 13/090/0

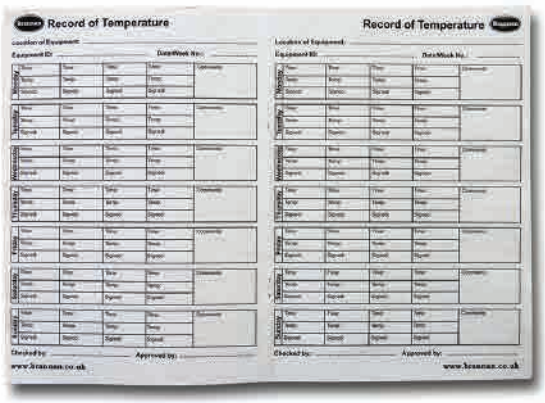

Log Book Kit Description	Thermometer Range	Product Dimensions	PIP Code	Product Number
1. Log Book Kit with Horizontal Thermometer	-30 to +30°C&F	203 x 100 x 30mm	401-9600	**22/495/3**
2. Log Book Kit with Vertical Thermometer	-30 to +40°C only	203 x 100 x 30mm	401-9642	**22/496/2**
3. Log Book Kit with Digital Thermometer	-50 to +70°C&F	203 x 100 x 35mm	401-9626	**22/497/3**
4. Replacement Log Book	n/a	210 x 148 x 3mm	401-9634	**13/090/0**

Medicine Storage Monitoring

Blood Bank Bottle Thermometer

This unique combination of short scale thermometer fitted in a sealed bottle will smooth out temperature fluctuations caused by the operation of thermostats or opening the storage cabinet.
Range: -5to +20°C only
Dimensions: 145 x 35mm dia
Pip Code: 320-1787
22100/2

Traceable Calibration Available

Statement of Conformity Available

Vaccine Thermometer

Vertical, hanging vaccine thermometer with zones to indicate the safe storage temperature for vaccines and medicines.
Range: -30 to +50°C only
Dimensions: 144 x 18 x 6mm
Pip Code: 320-1779
22/992/2

Bath Water Monitoring

Brannan offer a range of bath thermometers to assist in obtaining the correct temperature of bath water, therefore avoiding the risk of scalding or chilling. This is invaluable for babies or elderly people.

1. Scoop Bath Thermometer

An alternative method of checking bath water temperature by sampling.
Dual scale with zones indicating recommended temperatures.
Range: -25 to +50°C&F
Dimensions: 230 x 45 x 35mm
Pip Code: 031-3601
18/126/3

2. Horizontal Bath Thermometer

140mm white bath thermometer with zones showing recommended temperatures.
Range: -10 to +50°C&F
Dimensions: 140 x 25 x 10mm
Pip Code: 031-3619
18/132/3

3. Baby Bath & Food Thermometer

Pocket test thermometers supplied in protective cases for checking temperature of baby's bath or food.
thermometer marked with zones to indicate safe temperature of water.
Dimensions: 160 x 20 x 16mm
Pip Code: 032-6942
18/348/3

Traceable Calibration Available

Statement of Conformity Available

Description	Range	Product Dimensions	PIP Code	Product Number
1. Scoop Bath Thermometer	-25 to +50°C&F	145 x 34 x 7mm	031-3601	**18/126/3**
2. Horizontal Bath Thermometer	-10 to +50°C&F	140 x 25 x 10mm	031-3619	**18/132/3**
3. Baby Bath & Food Thermometer	0 to +50°C&F	160 x 20 x 16mm	032-6942	**18/132/3**

Veterinary & Pet Care

- Veterinary Thermometers
- Terrarium Instruments
- Brooder Thermometers
- Pool & Pond Thermometers
- General Application Instruments

Brannan

Veterinary and Terrarium Thermometers

Electronic Veterinary Thermometer

Easy to use electronic thermometer with chart showing Hobday's specification (the normal body temperature for a variety of animals). Rigid probe thermometer with protective case.
Range: +32 to +42.9°C
Accuracy*: +/-0.1°C
Dimensions: 145 x 25 x 15mm
LCD Dimensions: 6 x 18mm
11/015/2

Terrarium Instruments

Range of instruments which can be fixed inside a climate controlled chamber such as a terrarium for environmental monitoring.

Terrarium Thermometer
Dial thermometer with self adhesive pad for fixing inside terrarium.
Available in dual or single scale.
Range: -10 to +50°C&F
Dimensions: 60mm dia x 10mm
30/440/2 (°C only)
30/440/3 (°C&F)

Terrarium Hygrometer
Dial humidity meter with self adhesive pad for fixing inside terrarium.
Range: 0 to 100%RH
Dimensions: 60mm dia x 10mm
30/441/0

Terrarium Thermometer/Hygrometer
Twin temperature and humidity meter with self adhesive pad for fixing inside terrarium.
Range: -10 to +50°C&F
0 to 100%RH
Dimensions: 60mm dia x 10mm
30/442/2 (°C only & %RH)
30/442/3 (°C&F & %RH)

Gilt Dial Max Min Thermometer
Attractive dial max/min thermometer with hygrometer.
Black plastic case and red and blue max/min indicators.
Range: -20 to +50°C&F / 0 to 100%RH
Dimensions: 100mm diameter x 40mm
12/413/3

Traceable Calibration Available

Statement of Conformity Available

CE
RoHS
WEEE
Compliant

Dial Window Thermometer
Dial thermometer with easy to read blue and red temperature zones. Fixes to outside of window to read temperature.
Range: -20 to +50°C&F
Dimensions: 85 x 65 x 10mm
14/419/3

Twin Reading Thermometer & Humidity Meter
Instrument to measure indoor and outdoor temperature and humidity. Max/min recording. Main body includes magnet, clip and stand. 2 x 1m cables.
Range: -50 to +70°C&F
10 to 95% RH
Dimensions: 63 x 63 x 22mm
LCD Dimensions: 22 x 40mm
22/425/3

Digital Window Thermometer
Digital window thermometer for measuring outdoor temperature. The suction pad fixes to the outside of window or any flat surface.
The display has large numbers for easy reading.
Range: -20 to +60°C only
Dimensions: 85 x 43 x 25mm
LCD Dimensions: 30 x 20mm
14/400/2

Brooder Thermometers

Correct temperature control is essential for successful hatching. These thermometers will assist with the adjustment of thermostats and ventilation, helping to achieve optimum conditions during incubation. Choice of plastic or wooden brooder thermometers with easy to read scale and zones marked in weeks to show the various temperature levels required for brooding chicks.

Traceable Calibration Available

Statement of Conformity Available

Plastic Brooder Thermometer

150mm short wall thermometer with week zones to indicate temperature levels required for brooding chicks.This thermometer is ideally suited for customers own branding or design.
Range: -10 to +50°C only
Dimensions: 145 x 34 x 7mm
20/155/2

Narrow Tail Wooden Brooder Thermometer

Wooden thermometer with week zones to indicate temperature levels required for brooding chicks..
Range: -10 to +50°C only
Dimensions: 217 x 39 x 10mm
20/160/2

Description	Range	Dimensions	Product Number
Plastic Brooder Thermometer	-10 to +50°C only	145 x 34 x 7mm	**20/155/2**
Wooden Brooder Thermometer	-10 to +50°C only	217 x 39 x 10mm	**20/160/2**

Pool and Pond Thermometers

The monitoring of environmental conditions is important in keeping specialised or exotic fish. These thermometers will monitor the temperature of pond water for carp or other fish, or the temperature of your pool.

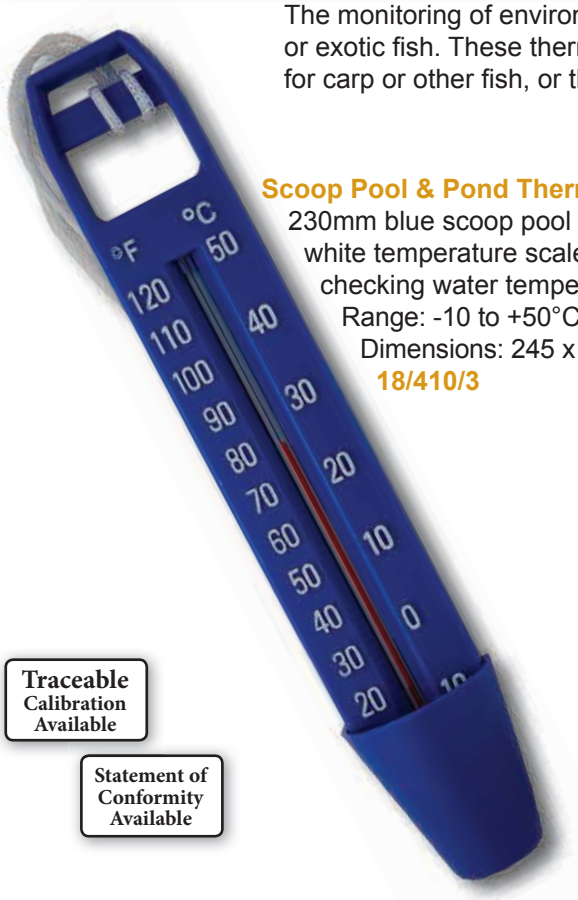

Scoop Pool & Pond Thermometer

230mm blue scoop pool and pond thermometer with white temperature scale. An alternative method of checking water temperature by sampling.
Range: -10 to +50°C&F
Dimensions: 245 x 46 x 30mm
18/410/3

Floating Pool Thermometer

Blue float supports a white thermometer with blue temperature scale.
Range: -10 to +50°C&F
Dimensions: 175 x 60 x 70mm
18/416/3

Traceable Calibration Available

Statement of Conformity Available

Description	Range	Dimensions	Product Number
Scoop Pool & Pond Thermometer	-10 to +50°C&F	245 x 46 x 30mm	**18/410/3**
Floating Pool Thermometer	-10 to +50°C&F	175 x 60 x 70mm	**18/416/3**

General Application Veterinary Thermometers

Indoor/Outdoor Thermometers

Hand held digital test thermometers with probe and lead for remote reading for use where temperatures are extreme or for dual location, for example indoor/outdoor, fridge or freezer, etc. All electronic instruments are CE, RoHS and WEEE compliant, and all instruments can be supplied with calibration certificates if required.

Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures. Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for remote reading.

Temp Range: -50 to +70°C&F
Dimensions: 98 x 74 x 17mm
LCD Dimensions: 35 x 52mm
12/412/3

Twin Reading Thermometer

BEST SELLER

Thermometer with max/min feature and high/low alarm settings. Reads outdoor and room temperature simultaneously and is also ideally suited to read room and fridge or freezer temperature.
Magnet attachment with 20mm probe and 2m probe cable.

Range: -50 to +70°C&F
Dimensions: 63 x 63 x 15mm
LCD Dimensions: 21 x 47mm
22/420/3

Fridge and Freezer Thermometers

Digital Fridge or Freezer Thermometer

UKAS Calibration Available

Electronic thermometer which displays fridge or freezer and room temperature. Alarm feature and 1m cable with suction pad.
Range: -50 to +70°C&F
Dimensions: 25 x 135 x 20mm
LCD Dimensions: 12 x 58mm
22/400/3

Statement of Conformity Available

Heavy Duty Fridge or Freezer Thermometer

Heavy duty fridge or freezer thermometer with clear plastic cover which reduces the effect of short-term fluctuations caused by thermostatic variations or through the operning of cabinet doors. Moulded in white plastic with blue scale and clear zones indicating recommended temperature for fridge and freezer. Stainless steel clips for fixture to appliance.
Range: -30 to +30°C
Dimensions: 30 x 120 x 19mm
22/450/3

Traceable Calibration Available

Batch Sampling Thermometers

These precision test thermometers are sealed into a 30ml polypropylene bottle containing a heat transfer medium and are ideally suited to monitor the temperature of samples in controlled storage. The bottle base of the assembly maintains a core temperature similar to that of the samples being monitored and is unaffected by short fluctuations caused by thermostatic variations or through the opening of cabinet doors. Clear reading **LO-*tox***™ blue filling eliminates the risk of mercury contamination.
These thermometers can be supplied with UKAS Certification on request.
Ranges: See table
Dimensions: 145 x 35mm diameter

Application	Range	Product Number
Freezer	-30 to 0°C	**22/101/2**
Refrigerator	-5 to +20°C	**22/103/2**
Incubator	-18 to +50°C	**22/105/2**

Meteorological Instrumentation

- Rain Gauges
- Hygrometers
- Environmental Meters
- Weatherstations

Brannan

Rain Gauges

Traditional rain gauges with printed scale designed to be placed at ground level to measure the amount of rain fall. Both models are supplied with charts to record measurements. Suitable for use in home gardens or for professional use.

Rain Gauge Kit

Heavy duty UV stabilised polypropylene moulded funnel and body. The measuring jar acts as the collection vessel and is calibrated in millimetres and inches. Rainfall capacity of up to 400ml. The kit is supplied complete with rainfall register book.
Spare 100mm jars and replacement weather registers available.
Range: 0 to 50mm / 0 to 2in
Dimensions: 290 x 120mm diameter

Rain Gauge Kit - 13/070/0
Replacement Jar - 13/061/0
Replacement Weather Register Book - 13/062/0

BEST SELLER

Rainfall Sprinkler Measure

A simple rain gauge in translucent material calibrated in millimetres and inches. Rainfall capacity of up to 400ml.
Supplied with rainfall chart. Replacement charts also available.
Range: 0 to 50mm / 0 to 2in
Dimensions: 210 x 100mm diameter

Rainfall Measure - 13/414/3
Replacement Rainfall Chart - 13/063/0

Mini Environmental Meters

Brannan is pleased to introduce a co-ordinating range of mini, hand held, environmental instruments to measure wind speed, sound levels, light, humidity and temperature. All instruments are supplied complete with battery and full operating instructions and can be supplied with certificate traceable to Recognised National Standard, if required. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

1. Pocket Anemometer & Thermometer

An easy to use, hand held, anemometer with wrist strap, giving accurate wind speed measurement and ambient temperature.

Measuring Range: 0 to 30 m/sec,
0 to 90 km/hour
-10 to +45°C&F

Dimensions: 105 x 40 x 15mm
LCD Dimensions: 23 x 32mm
13/430/0

2. Compact Sound Meter

Easy to use mini sound meter for monitoring sound levels in noisy environments.
Incorporates max/min and max hold functions.
Measuring Range: 40 to 130 dB
Dimensions: 128 x 54 x 34mm
LCD Dimensions: 20 x 24mm
13/413/0

New

3. Mini Anemometer

Wind speed meter to measure air velocity. User selectable units, max/min and data hold functions.
Measuring Range: 0.4 to 30 m/s
1.4 to 108 km/s
0.8 to 88 knots
0.9 to 67 Mph
Dimensions: 175 x 55 x 38mm
LCD Dimensions: 30 x 28mm
13/480/0
3 Point Calibration Cert: 49/705/0

New

4. Mini Sound Level Meter

Mini meter to measure sound level. Max/min and data hold functions.
Measuring Range: 30 to 130dB
Dimensions: 144 x 55 x 38mm
LCD Dimensions: 30 x 28mm
13/481/0
2 Point Calibration Cert: 49/706/0

New

5. Mini Light Meter

Hand held meter to measure illuminance. Silicone photo-diode with spectral response filter. Features include max/min recording and user selectable units.
Measuring Range: 0 to 200kLux
0 to 20kFc
Dimensions: 171 x 55 x 38mm
LCD Dimensions: 30 x 28mm
13/482/0
3 Point Calibration Cert: 49/707/0

New

6. Mini Humidity & Temperature Meter

A digital instrument which has been designed to combine the functions of a thermometer and humidity meter. Features user selectable units, max/min recording and data hold function.
Measuring Range: 0 to 100%RH
-30 to +70°C&F
Dimensions: 166 x 55 x 38mm
LCD Dimensions: 30 x 28mm
13/483/0
3 Point Calibration Cert: 49/708/0

CE
RoHS
WEEE
Compliant

Description	Range		Max/Min Function	LCD Dimensions	Product Dimensions	Product Number
1. Pocket Anemometer & Thermometer	0 to 30 m/sec -10 to 45°C&F	0 to 90 km/hour	✗	23 x 32mm	105 x 40 x 15mm	**13/430/0**
2. Pocket Sound Meter	40 to 130 dB		✓	20 x 24mm	128 x 54 x 34mm	**13/413/0**
3. Mini Anemometer	0.4 to 30 m/s, 0.8 to 88 knots,	1.4 to 108 km/s 0.9 to 67 Mph	✓	30 x 28mm	175 x 55 x 38mm	**13/480/0**
4. Mini Sound Level Meter	30 to 130dB,		✓	30 x 28mm	144 x 55 x 38mm	**13/481/0**
5. Mini Light Meter	0 to 200 klux	0 & 20 kFc	✓	30 x 28mm	171 x 55 x 38mm	**13/482/0**
6. Mini Humidity & Temperature Meter	0 to 100%RH	-30 to 70°C&F	✓	30 x 28mm	166 x 55 x 38mm	**13/483/0**

Hygrometers

These instruments measure the amount of water vapour in the atmosphere, on a percentage scale knowns as Relative Humidity (%RH). All instruments can be supplied with certificate traceable to Recognised National Standard or Statement of Conformity if required.

Mini Humidity and Temperature Meter

New

A digital instrument which has been designed to combine the functions of a thermometer and humidity meter. Features user selectable units, max/min recording and data hold function.
Measuring Range: 0 to 100%RH
-30 to +70°C&F
Dimensions: 166 x 55 x 38mm
LCD Dimensions: 30 x 28mm
13/483/0
3 Point Calibration Cert: 49/708/0

Traceable Calibration Available

Twin Reading Humidity Meter and Thermometer

New

Instrument to measure indoor and outdoor temperature and humidity. Max/min recording. Main body includes magnet, clip and stand.
2 x 1m cables.
UKAS calibration certificate can be supplied for external probes on request.
Range: 10 to 95% RH
-50 to +70°C&F
Dimensions: 63 x 63 x 22mm
22/425/3

UKAS Calibration Available

CE RoHS WEEE Compliant

Mini Dial Hygrometer and Twin Hygrometer/Thermometer

Slate blue hygrometer and twin hygrometer/thermometer dial instruments with dark blue scales and red pointers. Temperature scale available in single or dual scale.

Mini Dial Description	Range	Product Dimensions	Product Number
Hygrometer	0 to 100%RH	65 x 65 x 10mm	**30/411/0**
Twin Thermometer & Hygrometer	°C only and %RH	130 x 65 x 10mm	**30/412/2**
	°C&F and %RH	130 x 65 x 10mm	**30/412/3**

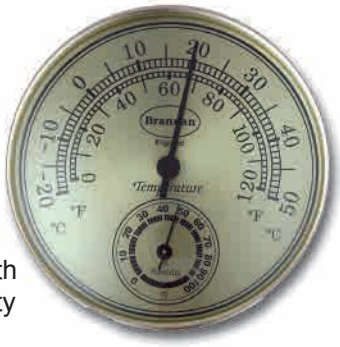

Gilt Dial Thermometer and Hygrometer

100mm diameter dial with temperature and humidity scales printed in black.
Range: -20 to +50°C&F / 0 to 100%RH
Dimensions: 100mm dia x 27mm
30/407/3

Gilt Dial Max/Min Thermometer and Hygrometer

Attractive dial max/min thermometer with hygrometer. Gilt face with black plastic case and red and blue max/min indicators.
Range: -20 to +50°C&F / 0 to 100%RH
Dimensions: 100mm dia x 40mm
12/413/3

Gilt Dial Barometer

Attractive dial barometer with black plastic case and pointer.
Range: 940 to 1060 hPa
72 to 80 mm/Hg
Dimensions: 80mm diam x 35mm
28/009/0

Hair Hygrometer

100mm dial instrument with gold coloured scale, polished brass bezel and hanging ring. Complete with instructions.
Range: 0 to 100%RH
Dimensions: 105mm dia x 28mm
30/900/0

Whirling Hygrometers

The difference between the “wet and “dry” bulb temperatures enables the %RH to be determined through the use of tables or a calculator which are supplied with our hygrometers. Whirling hygrometers, also known as sling psychrometers, employ the “wet” and “dry” bulb principal to determine %RH. They are designed to be rotated, by hand, to provide adequate and consistent ventilation of the bulbs. These hygrometers are now filled with a blue spirit filling.
These hygrometers can be supplied with UKAS calibration certificates or Statement of Conformity if required.

UKAS Calibration Available

Compact Psychrometer

This instrument uses shorter tubes and the design incorporates a slide rule type calculator to determine the %RH. The body of the instrument slides away into the handle providing complete protection when not in use. The psychrometer is available in choice of Celsius or Fahrenheit only scales.
Range: -5 to +50°C or 0 to 120°F
Dimensions: 210 x 36 x 16mm

13/606/2 (°C only)
13/606/1 (°F only)

Replacement Tube - 13/605/2
Replacement Tube - 13/605/1

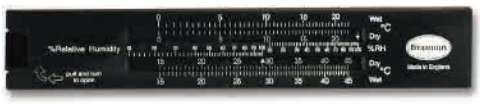

Whirling Hygrometer with Folding Handle

This traditional model has a folding handle and is supplied in a protective canvas carry case with calculator chart and instructions to determine %RH. Available in Celsius scale only.
Range: -5 to +50°C only
Dimensions: 237 x 143 x 29mm

13/744/2
Replacement Tube - 13/044/2
Replacement Pot - 13/046/0

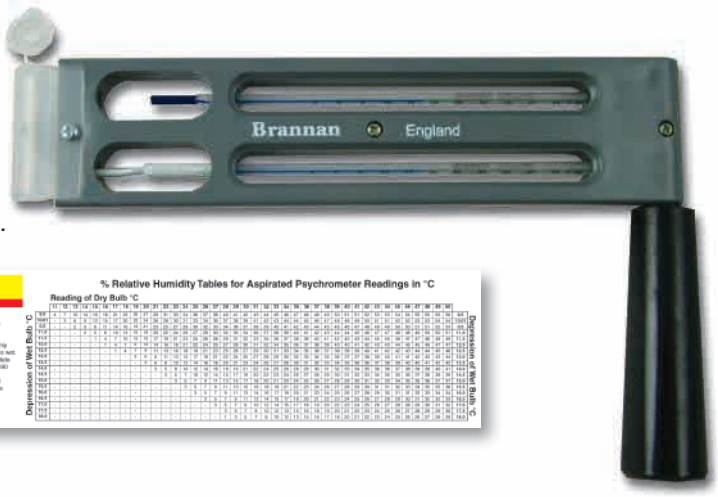

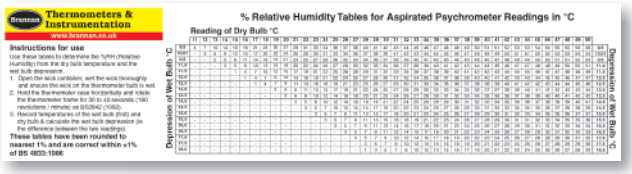

Masons Hygrometers

Masons Hygrometer

White polypropylene case with water container and wick. Supplied complete with calculator chart and instructions to determine %RH.
Replacement water container pots and wick also available.
Range: -5 to +50°C&F or °C only
Dimensions: 310 x 77 x 32mm

13/222/3 (°C&F)
Pack of 12 Replacement Wicks 13/084/0
Replacement Pot 13/087/0

Statement of Conformity Available

Digital Weatherstations

Digital max/min thermometers to measure humidity and indoor and outdoor temperature. Probe thermometers can be supplied with Calibration Certificate traceable to National Standards if required. UKAS Calibration Certificate can be supplied for external probes. The instruments are supplied complete with battery and full operating instructions. All electronic instruments are CE, WEEE and RoHS compliant. Full certification is available via our website.

1. Max/Min Indoor/Outdoor Thermometer

White moulded case with two displays for indoor and outdoor temperatures. Display can be switched from °C to °F and has max/min recording facilities. Complete with stand and 2.5m cable for outdoor reading.

Temperature Range: -50 to +70°C&F
Dimensions: 98 x 74 x 17mm
LCD Dimensions: 35 x 52mm
12/412/3

Traceable Calibration Available

UKAS Calibration Available

2. Jumbo Max/Min Thermometer & Hygrometer

Twin displays to read indoor temperature and humidity or indoor and outdoor temperatures. Complete with stand and 2m cable.
Temp Range: -50 to +70°C&F
Humidity Range: 20 to 99%RH
Dimensions: 103 x 98 x 21mm
LCD Dimensions: 60 x 80mm
12/421/3

BEST SELLER

3. Wireless Indoor/Outdoor Thermometer & Hygrometer

Wireless unit with radio frequency for transmission and reception up to 30m. °C/F selectable, indoor/outdoor temperature at a glance with max/min temperature memory and hygrometer.
Temperature Range: -50 to +70°C&F
Hygrometer Range: 1 to 99%RH
Main Unit Dimensions: 121 x 72 x 24mm
Transmitter Dimensions: 100 x 70 x 22mm
LCD Dimensions: 35 x 40mm
12/425/3

Statement of Conformity Available

CE RoHS WEEE Compliant

4. Weatherstation

Max/min thermometer with silvered front and black trim. Large display with simultaneous reading of temperature and humidity. Alarm functions on both temperature and humidity. Complete with stand or hook for wall hanging and 2m cable for outdoor probe.

Temperature Range: -20 to +70°C&F
Humidity Range: 20 to 99%RH
Dimensions: 98 x 74 x 17mm
LCD Dimensions: 35 x 52mm
13/420/3
Replacement Probe - 13/420/4

5. Indoor/Outdoor Humidity & Temperature Meter

New

Instrument to measure indoor and outdoor humidity and temperature. Max/min recording. Main body includes magnet, clip and stand. 2 x 1m cables.

Temperature Range: -50 to +70°C&F
Humidity Range: 10 to 95% RH
Dimensions: 63 x 63 x 22mm
LCD Dimensions: 22 x 40mm
22/425/3

Weatherstation Description	Range		Max/Min Function	Cable Length	LCD Dimensions	Product Dimensions	Product Number
	Internal Reading	Remote Probe Reading					
1. Max/Min Indoor/Outdoor	0 to +50°C&F	-50 to +70°C&F	✓	2.5m	35 x 52mm	98 x 74 x 17mm	**12/412/3**
2. Jumbo Max/Min Thermometer & Hygrometer	-10 to +50°C&F & 20 to 99%RH	-50 to +70°C&F	✓	2.0m	60 x 80mm	103 x 98 x 21mm	**12/421/3**
3. Wireless Weatherstation	-	-50 to +70°C&F & 1 to 99%RH	✓	2.5m	35 x 40mm	121 x 72 x 24mm & 100 x 70 x 22mm	**12/425/3**
4. Weatherstation	0 to +50°C&F & 20 to 99%RH	-20 to +70°C&F	✓	-	35 x 52mm	98 x 74 x 17mm	**13/420/3**
4. Replacement Probe	-	-	-	2.0m	-	-	**13/420/4**
5. Twin Reading Thermometer & Humidity Meter	-10 to +50°C&F & 10 to 95%RH	-50 to +70°C&F & 10 to 95%RH	✓	1.0m	22 x 40mm	63 x 63 x 22mm	**22/425/3**

Calibration Services

- UKAS Accredited Laboratory
- Certificate of Calibration

Brannan

Calibration Services

To complement the production facilities of **Brannan Thermometers**, a comprehensive calibration service is available for a variety of instruments such as electronic max/mins and weatherstations, fridge or freezer thermometers and wall thermometers. In addition, we are able to calibrate many other measuring instruments, including pressure gauges and hydrometers.
This service is available, for an additional charge, at time of product's purchase or for customers own existing instruments. Please contact our Sales Team to discuss the suitability of your instrument for calibration.

What is a Calibration & Why Calibrate

- A calibration is a procedure in which an instrument is tested to ensure it conforms with a recognised standard and is used to verify the accuracy of an instrument.
- By comparing an instrument of a known value against a second instrument (unit under test), the difference can be calculated and suitable corrections determined.
- Calibration points can be drawn on a graph and joined together to form a calibration curve. This allows the user to estimate the corrections at points where a calibration value has not been measured.

Re-Calibration Service

We offer a re-calibration service for customers' own instruments. The calibration frequency for a specific thermometer is up to the individual customer however it should be based on factors such as:

- The environment in which the instrument is used,
- The frequency of use and
- The level of confidence required in the readings taken from the customers' process.

To complement our calibration services, we are able to supply packaging for use when sending your instrument to us to help reduce the risk of breakage during transit.

UKAS Accredited Laboratory

UKAS CALIBRATION
0582

- Our facilities conform to (BS) EN ISO/IEC 17025: 2005 – 'General requirements for the competence of testing and calibration laboratories'.
- Certification is available for test temperatures between -60°C and +250°C.
- Certificates are produced with reference to the International Temperature Scale of 1990 (ITS-90).

CERTIFICATE OF CALIBRATION

ISSUED BY S.Brannan & Sons Ltd

DATE OF ISSUE 27 March 2015

Client A N Other

Address

Clients Order No

Apparatus Tested Electronic Thermometer

Type / Specification Electronic Digital Thermometer

Range & Division / Accuracy or Resolution -50/70°C & °F 0.1°C (External Probe Only)

Calibration Immersion Nmm

Serial No

CALIBRATION CONDITIONS

Date Instrument Received 24 March 2015

Date Calibration/Test Completed 27 March 2015

Laboratory Temperature 20°C+/-1°C

Laboratory Humidity 20% to 80% (RH)

EXAMPLE

Example of UKAS Calibration Certificate

Additional Calibration Services

In addition to our UKAS Accredited Calibration Laboratory, we have the capability of providing calibration certificates traceable to National Standards for many other instruments.

Example of Calibration Certificate traceable to National Standards

CERTIFICATE OF CALIBRATION

ISSUED BY : S.Brannan and Sons Limited

CALIBRATION DATE 26/01/2010

CERTIFICATE NUMBER 2290 / 2

SERIAL NUMBER 6901 to

Supplied to: BRANNAN

Instrument Type: DIGITAL INDOOR THERMO HYGROMETER

Range: -50/70°C & °F (EXTERNAL SENSOR ONLY)

Resolution: 0.1°C

Increments: 10mm

Thermometer Reading	Calibration Temperature	Mercury Column Temperature	Standard Instrument Reference
°C	°C	°C	
-40.0	-40.00	N/A	2290/1 - 2290/2
0.0	0.00	N/A	2290/1 - 2290/2
60.0	60.00	N/A	2290/1 - 2290/2

Signed:

EXAMPLE

All of our prices are competitive and quantity discounts apply.
Please contact us for further details on the above, the most suitable calibration for your instrument or to discuss other instruments suitable for Certification.

Index

Brannan

Index by Product Name

	Page No
Bath Thermometers	
Scoop Bath Thermometer	34, 48
Horizontal Bath Thermometer	34, 48
Baby Bath Pocket Test Thermometer	14, 34, 48
Clocks	
Large Wall Clock with Thermometer & Hygrometer	7, 27
270mm Wall Dial Clock	7, 27
Dial Wall Thermometers & Hygrometers	
270mm Wall Dial Thermometer & Hygrometer	7, 27, 28
Decorative Dial Thermometers	28
Decorative Dial Hygrometers	28, 56
Hypothermia Dial Thermometer	44
Rainbow Patio Dial Thermometer	7, 28
Environmental Instruments	
Mini Enviromental Meters	55, 56
Whirling Hygrometers	57
Masons Hygrometers	57
Healthcare	
Body Thermometers	33, 43
Clinical Thermometers	32, 42
Ear Thermometers	33, 43
Forehead Thermometers	33, 43
Medicine Storage	48, 52
Ovulation Kit	32, 42
Kitchen Instrumentation - General	
Baby Food Pocket Test Thermometer	14, 34, 46
BBQ/Grill Thermometer	15
Cook's Thermometers	14
Infrared Thermometer	15
Meat Roast Thermometers	15
Oven Thermometers	15
Probe Thermometers	16-17, 46
Sugar & Jam Thermometer	14
Wine & Beeer Instruments	21
Yoghurt Pocket Test Thermometers	14
Kitchen Instrumentation - Refrigeration	
Cold Storage	21
Fridge or Freezer Thermometers	18-19, 46, 52
Refrigeration Log Kits	20, 47
Max/Min Thermometers	
Liquid-in-Glass Max/Mins	10-11, 44
Dial Max/Mins	11, 28
Digital Max/Mins	12, 44
Pool and Pond Thermometers	
Scoop Pool & Pond Thermometer	5, 51
Floating Pool Thermometer	5, 51
Rain Gauges	
Rain Gauge Kit	5, 54
Rainfall Sprinkler Measure	5, 54
Soil Meters	
Gardener's Pocket Test Thermometer	4
Propagation Thermometer	4
Soil Meters	4
Timers	
Kitchen Timers	14, 37
Multi Count Timers	38
Single Count Timers	36-37, 44
Sand Timers	40
Stopwatches	39
Tally Counters	39
Wall Thermometers	
145mm Standard Wall Thermometer	6, 22
150mm Standard Wall Thermometer	22
215mm Standard Wall Thermometer	6, 22
215mm Illustrated Wall Thermometers	6, 23
240mm Standard Wall Thermometer	22
240mm Nursery Wall Thermometers	23, 24, 44
380mm Standard Wall Thermometer	6, 22
380mm Illustrated Wall Thermometer	6, 23
Digital Wall Thermometers	26
Hypothermia Wall Thermometers	24, 45
Two Piece Wall Thermometers	25
Wall Thermometers with Energy Saving Tips	24, 44
Wooden Wall Thermometers	25
Weatherstations	
Digital Weatherstations	8-9, 30-31, 52, 58
Window Thermometers	
Dial Window Thermometer	7 , 29
Digital Window Thermometer	7, 29
Veterinary Thermometers	
Digital Veterinary Thermometer	50
Terrarium Instruments	50
Brooder Thermometers	51

Index by Product Number

		Page No
10/801/0	Wine & Beer Hydrometer	21
11/015/2	Veterinary Thermometer	50
11/020/3	Ovulation Kit	32
11/064/2	Standard Oral Clinical Thermometer	32, 42
11/065/2	Flexi-head Oral Clinical Thermometer	32, 42
11/066/2	Standard Oral Clinical Thermometer	32, 42
11/400/3	Body & Surface Temperature IR Thermometer	33, 43
11/420/3	IR Ear Thermometer	33, 43
11/421/0	IR Ear Thermometer - Replacement Probe Covers	33, 43
11/440/3	IR Forehead Thermometer	33, 43
11/465/3	Forehead Strip Temperature Indicator	33, 43
12/401/2	Magnet Reset Solway Max/Min Thermometer - °C only	10
12/401/3	Magnet Reset Solway Max/Min Thermometer - °C&F	10
12/403/2	Cream Case Quick Set Max/Min Thermometer - °C only	11
12/403/3	Cream Case Quick Set Max/Min Thermometer - °C&F	11
12/404/2	Green Case Heavy Duty Max/Min Thermometer - °C only	10
12/404/3	Green Case Heavy Duty Max/Min Thermometer - °C&F	10
12/407/2	Magnet Reset Slimline Max/Min Thermometer - °C only	10
12/407/3	Magnet Reset Slimline Max/Min Thermometer - °C&F	10
12/408/2	White Case Quick Set Max/Min Thermometer - °C only	11
12/408/3	White Case Quick Set Max/Min Thermometer - °C&F	11, 44
12/411/2	Grey Case Heavy Duty Max/Min Thermometer - °C only	10
12/411/3	Grey Case Heavy Duty Max/Min Thermometer - °C&F	10
12/412/3	Max/Min Indoor/Outdoor Thermometer	8, 30, 44, 52, 58
12/413/3	Gilt Dial Max/Min Thermometer	28, 50, 56
12/414/2	Green Case Max/Min Thermometer with Roof - °C only	11
12/414/3	Green Case Max/Min Thermometer with Roof - °C&F	11
12/415/2	White Case Max/Min Thermometer with Roof - °C only	11
12/415/3	White Case Max/Min Thermometer with Roof - °C&F	11
12/421/3	Jumbo Max/MinThermometer & Hygrometer	8, 30, 58
12/425/3	Wireless Indoor/Outdoor Thermometer & Hygrometer	8, 25, 58
12/424/3	Outdoor Electronic Max/Min Thermometer	12, 26
12/426/3	White Case Large Electronic Max/Min Thermometer	12, 26
12/427/3	Green Case Large Electronic Max/Min Thermometer	12, 26
12/428/3	Electronic Max/Min Thermometer with Roof	12, 26
12/429/3	Classic Design Electronic Max/Min Thermometer	12, 26
12/450/3	Dial Max/Min Thermometer	11, 29
13/044/2	Whirling Hygrometer - Replacement Tube	57
13/046/2	Whirling Hygrometer - Replacement Pot	57
13/061/0	Rain Gauge Kit - Replacement Jar	5, 54
13/062/0	Rain Gauge Kit - Replacement Weather Register Book	5, 54
13/063/0	Rainfall Sprinkler Measure - Replacement Charts	5, 54
13/070/0	Rain Gauge Kit	5, 54
13/084/0	Masons Hygrometer - Replacement Wicks	57
13/087/0	Masons Hygrometer - Replacement Pot	57
13/090/0	Temperature Log Book Kit - Replacement Log Book	20, 47
13/222/3	Masons Hygrometer	57
13/400/0	3-Way Soil Meter	4
13/402/0	Soil PH Meter	4
13/403/3	Gardeners's Pocket Test Thermometer	4
13/413/0	Compact Sound Meter	55
13/414/3	Rainfall Sprinkler Measure	5, 54
13/417/3	Glass Stem Soil Thermometer	4
13/418/3	Propagation Thermometer	4
13/420/3	Weatherstation	9, 31, 58
13/420/4	Weatherstation - Replacement Probe	9, 31, 58
13/430/0	Pocket Anemometer & Thermometer	55
13/480/0	Mini Anemometer	55
13/481/0	Mini Sound Level Meter	55
13/482/0	Mini Light Meter	55
13/483/0	Mini Humidity & Temperature Meter	55, 56
13/605/1	Compact Psychrometer - °F only - Replacement Tube	57
13/605/2	Compact Psychrometer - °C only - Replacement Tube	57
13/606/2	Compact Psychrometer - °F only	57
13/606/1	Compact Psychrometer - °C only	57
13/722/4	Whirling Hygrometer	57
14/400/2	Digital Window Thermometer	7, 29, 50
14/402/3	Wood and Brass Wall Thermometer	25
14/419/3	Dial Window Thermometer	7, 29, 50
14/431/2	Short Wooden Wall Thermometer - °C only	25
14/431/3	Short Wooden Wall Thermometer - °C&F	25
14/432/2	Long Wooden Wall Thermometer - °C only	25
14/432/3	Long Wooden Wall Thermometer - °C&F	25
14/433/2	Standard 380mm Wall Thermometer - °C only	6, 22
14/433/3	Standard 380mm Wall Thermometer - °C&F	6, 22
14/435/2	Standard 215mm Wall Thermometer - °C only	6
14/435/3	Standard 215mm Wall Thermometer - °C&F	6
14/436/2	Standard 145mm Wall Thermometer - °C only	6, 22
14/436/3	Standard 145mm Wall Thermometer - °C&F	6, 22
14/437/3	Indoor/Outdoor Thermometer with Clock	9, 31
14/438/3	150mm Wall Thermometer	22
14/440/2	Standard 240mm Wall Thermometer - °C only	22
14/440/3	Standard 240mm Wall Thermometer - °C&F	22
14/441/3	Long Two Piece Wall Thermometer	25
14/442/3	Short Two Piece Wall Thermometer - Blue	25
14/450/3	240mm White Wine Design Thermometer	21
14/451/3	240mm Red Wine Design Thermometer	21
14/460/3	Wild Fruits Decorative 215mm Wall Thermometer	6, 23
14/461/3	Country Gate Decorative 215mm Wall Thermometer	6, 23
14/462/3	Butterfly Decorative 215mm Wall Thermometer	6, 23
14/463/3	Pack of 6 Decorative 215mm Wall Thermometer	6, 23
14/470/3	Humpty Dumpty Nursery Wall Thermometer	23
14/472/2	Teddy Bear Nursery Wall Thermometer	23, 44
14/473/2	Pack of 6 Nursery Wall Thermometer	23
14/474/2	Giraffe & Bear Nursery Wall Thermometer	23, 24
14/480/3	Decorative 380mm Wall Thermometer	6, 23
14/614/3	Short Two Piece Wall Thermometer - Cream	25
14/705/3	240mm Cellar Thermometer	21
14/810/3	240mm Low Range Room Thermometer	21
14/862/2	150mm Hypothermia Wall Thermometer	24, 45
14/865/2	Carded Dial Hypothermia Thermometer	45
14/866/2	215mm Hypothermia Wall Thermometer	24, 45
14/867/2	240mm Hypothermia Wall Thermometer	24, 45

Index by Product Number

		Page No
14/868/2	Hanging Dial Hypothermia Thermometer	45
14/875/2	150mm Wall Thermometer - Energy Saving Design	24, 44
14/876/2	215mm Wall Thermometer - Energy Saving Design	24
14/877/2	240mm Wall Thermometer - Energy Saving Design	24
15/354/2	Glass Stem Hotbed Thermometer - °C only	4
15/354/3	Glass Stem Hotbed Thermometer - °C&F	4
15/358/2	Glass Stem Soil/Concrete Thermometer - °C only	4
15/458/2	Glass Stem Soil/Concrete Thermometer Refill - °C only	4
15/554/2	Glass Stem Soil Thermometer - °C only	4
15/554/3	Glass Stem Soil Thermometer - °C&F	4
15/354/2	Glass Stem Hotbed Thermometer	4
15/754/2	Glass Stem Hotbed Thermometer Refill - °C only	4
15/854/2	Glass Stem Soil Thermometer Refill - °C only	4
15/854/3	Glass Stem Soil Thermometer Refill - °C&F	4
15/954/3	Glass Stem Hotbed Thermometer Refill - °C&F	4
18/126/3	Scoop Bath Thermometer	34, 48
18/132/3	Horizontal Bath Thermometer	34, 48
18/348/3	Baby Food & Bath Pocket Test Thermometer	14, 34, 46, 48
18/410/3	Scoop Pool & Pond Thermometer	5, 51
18/416/3	Floating Pool & Pond Thermometer	5, 51
20/155/2	Plastic Brooder Thermometer	51
20/160/2	Wooden Brooder Thermometer	51
21/471/2	Brass Sugar & Jam Thermometer	14
21/474/2	Stainless Steel Cooking Thermometer	14
21/475/3	Cooks Pocket Test Thermometer	14
21/489/2	Yoghurt Pocket Test Thermometer	14
21/594/3	Wine & Beer Thermometer	21
22/100/2	Blood Bank Botttle Thermometer	48
22/101/2	Batch Sampling Thermometer - Freezer	52
22/103/2	Batch Sampling Thermometer - Refrigerator	52
22/105/2	Batch Sampling Thermometer - Incubator	52
22/375/3	240mm Cold Room Thermometer	21
22/400/3	Digital Fridge or Freezer Thermometer	18, 46, 52
22/402/2	Stainless Steel Fridge or Freezer Thermometer Dial	18
22/420/3	Twin Reading Thermometer	9, 18, 31, 52
22/425/3	Twin Reading Thermometer & Hygrometer	9, 31, 50, 56, 58
22/430/3	Heavy Duty Fridge or Freezer Thermometer - Magnet Fixture	18
22/440/2	Twin Fridge and Freezer Thermometers	18
22/450/3	Heavy Duty Fridge or Freezer Thermometer - Clip Fixture	18, 52
22/474/2	Dial Fridge or Freezer Thermometer - Standard Design	18
22/475/2	Dial Fridge or Freezer Thermometer - Penguin Design	18, 46
22/482/2	Maximum Recording Fridge Guard Thermometer	18
22/483/2	Horizontal Fridge or Freezer Thermometer - Standard Design	19, 46
22/485/2	Horizontal Fridge or Freezer Thermometer - Penguin Design	19
22/486/2	Horizontal Fridge or Freezer Thermometer - Polar Bear Design	19
22/488/2	Horizontal Fridge or Freezer Thermometer - Sundae Design	19
22/489/2	Horizontal Fridge or Freezer Thermometer - Pack of 6	19
22/491/2	Vertical Fridge or Freezer Thermometer	19, 46
22/494/2	Horizontal Fridge or Freezer Thermometer - Energy Save Design	19
22/495/3	Temperature Log Book Kit - with Horizontal Thermometer	20, 47
22/496/3	Temperature Log Book Kit - with Vertical Thermometer	20, 47
22/497/3	Temperature Log Book Kit - with Digital Thermometer	20, 47
22/992/2	Vaccine Thermometer	48
23/400/3	Classic Dial Oven Thermometer	15
23/401/2	Classid Dial Meat Roasing Thermometer	15
23/403/3	Digital Cooking Test Thermometer	16
23/404/0	Digital Cooking Test Thermometer - Replacement Probe	16
23/405/3	BBQ/Grill Thermometer	15
23/464/2	Horizontal Oven Thermometer	15
23/472/2	Premium Dial Meat Roasting Thermometer	15
28/009/0	Gilt Barometer	28, 56
28/200/0	Taxi Timer	36
28/201/0	Fire Engine Timer	36
28/202/0	Heavy Duty Timer	36
28/203/0	Large Timer	36
28/204/0	Numeric Setting Timer & Clock	36
28/205/0	Mini Timer	36
28/206/0	Dual Timer & Clock	38
28/207/0	Triple Timer & Clock	38
28/208/0	Jumbo Dual Timer & Clock	38
28/210/0	Timer & Clock	14, 36, 44
28/211/0	Dual Timer & Clock	38
28/212/0	Four Way Timer & Clock	38
28/213/0	Slimline Timer	37
28/214/0	Triple Timer & Clock	38
28/215/0	Water Resistant Timer	37
28/216/0	“Egg” Timer	37
28/217/0	Kitchen Timer	14, 37
28/218/0	Pocket Timer	37
28/400/0	Sports Stopwatch	39
28/401/0	Water Resistant Stopwatch	39
28/402/0	Standard Stopwatch	39
28/501/0	Hand Held Tally Counter	39
28/502/0	Dest Top Tally Counter	39
28/503/0	Digital Tally Counter	39
28/600/0	Large Wall Clock with thermometer & Hygrometer	27
28/601/0	270mm Dial Wall Clock	7, 27, 28
28/602/0	270mm Dial Wall Thermometer & Hygrometer	7, 27, 28
28/603/0	Pack of 2 x 270mm Wall Dials	7, 27, 28
28/700/0	Small Sand Timers - Pack of 3pcs Mixed Colours	40
28/701/0	Small Sand Timers - Pack of 10pcs Green	40
28/702/0	Small Sand Timers - Pack of 10pcs Yellow	40
28/703/0	Small Sand Timers - Pack of 10pcs Blue	40
28/704/0	Jumbo Sand Timer - Red	40
28/705/0	Jumbo Sand Timer - Green	40
28/706/0	Jumbo Sand Timer - Pink	40
28/707/0	Jumbo Sand Timer - Yellow	40
28/708/0	Jumbo Sand Timer - Blue	40
28/709/0	Jumbo Sand Timer - Orange	40
28/710/0	Jumbo Sand Timer - Purple	40
28/711/0	Jumbo Sand Timer - Black	40
28/720/0	Small Sand Timers - Pack of 3pcs Green	40
28/721/0	Small Sand Timers - Pack of 3pcs Yellow	40

Index by Product Number

		Page No
28/722/0	Small Sand Timers - Pack of 3pcs Blue	40
30/120/5	Rainbow Patio Dial Thermometer	7, 28
30/407/3	Gilt Dial Thermometer & Hygrometer	28, 56
30/408/2	Mini Dial Thermometer - °C only	28
30/408/3	Mini Dial Thermometer - °C&F	28
30/411/0	Mini Dial Hygrometer	28, 56
30/412/2	Mini Dial Thermometer & Hygrometer - °C only	28, 56
30/412/3	Mini Dial Thermometer & Hygrometer - °C&F	28, 56
30/420/2	Thermometer Fridge Magnet - Cricketer Bear Design	28
30/421/2	Thermometer Fridge Magnet - Sundae Design	28
30/440/2	Terrarium Dial Thermometer - °C only	50
30/440/3	Terrarium Dial Thermometer - °C&F	50
30/441/0	Terrarium Dial Hygrometer	50
30/442/2	Terrarium Dial Thermometer & Hygrometer - °C only	50
30/442/3	Terrarium Dial Thermometer & Hygrometer - °C&F	50
30/900/0	Hair Hygrometer	56
31/147/0	Swivel Head Digital Pocket Test Thermometer	16
31/150/0	125mm Milk & Coffee Test Thermometer	14
31/151/0	175mm Milk & Coffee Test Thermometer	14
31/155/0	Short Digital Pocket Test Thermometer	16
31/156/0	Long Digital Pocket Test Thermometer	16
31/157/0	Digital Catering Test Thermometer	16
31/160/0	Vertical Barrel Digital Pocket Test Thermometer	16
31/161/0	Horizontal Barrel Digital Pocket Test Thermometer	16
31/162/0	Digital Waterproof Test Thermometer	17, 46
31/163/0	Digital Waterproof Test Thermometer	17
31/164/0	Digital Waterproof Test Thermometer	17
31/175/0	Digital Folding Probe Test Thermometer	16
38/650/0	Hand Held Digital Test Thermometer	17
38/650/1	Hand Held Digital Test Thermometer - Replacement Probe	17
38/660/0	Hand Held Digital Test Thermometer with Alarm	17
38/660/1	Hand Held Digital Test Thermometer with Alarm - Replacement Probe	17
38/703/0	Infrared Thermometer	15
49/705/0	3 Point Calibration Certificate for Mini Anemometer	55
49/706/0	3 Point Calibration Certificate for Mini Sound Meter	55
49/707/0	3 Point Calibration Certificate for Mini Light Meter	55
49/708/0	3 Point Calibration Certificate for Mini Hum & Temp Meter	55, 56

Brannan Conflict Minerals Policy

tel: +44 (0)1946 816600 fax: +44 (0)1946 816625 email: sales@brannan.co.uk web: www.brannan.co.uk

In August 2012 the US Securities and Exchange Commission (SEC) approved a conflict minerals rule as mandated by the Dodd-Frank Wall Street Reform and Consumer Protection Act. This rule imposes new supply chain reporting requirements on publicly traded companies to promote transparency and consumer awareness regarding the use of "conflict minerals" (specifically the metals tantalum, tin, tungsten and gold) in their products.

The new reporting requirements are based on concerns that revenues obtained from mining and transport of conflict minerals finance the ongoing conflict in the Democratic Republic of Congo (DRC) and surrounding countries and the resulting humanitarian crises.

Although reporting requirements only apply to publicly traded companies required to report to the SEC, these requirements are expected to affect the entire electronics industry supply chain. Any company supplying products to an affected company is expected to be asked for conflict minerals information.

S.Brannan & Sons Limited has a proud reputation for delivering quality products and is committed to sourcing only from reputable suppliers. We can confirm that we have received confirmation from all our suppliers that their products adhere to this new ruling.

This policy is available for customers and members of the public on request or via our website www.brannan.co.uk

Signed: ABrannan Date: 16 April 2014

Andrew Brannan
Joint Managing Director

Brannan Environmental Policy

tel: +44 (0)1946 816600 fax: +44 (0)1946 816625 email: sales@brannan.co.uk web: www.brannan.co.uk

S.Brannan & Sons Limited recognises that its activities, products and services have an environmental impact at all stages of the product life cycle. We are committed to making continual reductions in this impact.

In order to achieve this objective S.Brannan & Sons Limited will:

- ensure efficient use of electricity and gas in production, lighting and heating.
- ensure efficient use of components, consumables and water.
- ensure efficient use of machinery and equipment through maintenance and repair.
- minimise all waste materials from production and administration activities.
- minimise pollution in the form of waste and emissions.
- minimise noise pollution.
- work with customers, suppliers and employees to raise awareness of environmental issues and to stress the importance of reducing our environmental impact.
- review and revise this policy as necessary at regular intervals.

The Company will comply with all relevant legislation and customer standards and conduct a regular review of its environmental impact with the aim of continuous improvement in all aspects of its operations.

This policy is available for customers and members of the public on request or via our website www.brannan.co.uk

Signed: ABrannan Date: 16 January 2013

Andrew Brannan
Joint Managing Director

Brannan Quality Policy

tel: +44 (0)1946 816600 fax: +44 (0)1946 816625 email: sales@brannan.co.uk web: www.brannan.co.uk

S.Brannan & Sons Limited has a proud reputation for delivering quality products and is totally committed to understanding and meeting the needs and expectations of all our customers.

In order to achieve this objective S.Brannan & Sons Limited will:

- actively promote the philosophy that quality is the responsibility of every employee and that customer satisfaction is paramount.
- conduct our business in a professional and ethical manner.
- deliver products and services on time and at the agreed price
- ensure the quality of products and services through structured staff training and development.
- make informed business decisions based on data gathered from our processes.

The Company will comply with all relevant legislation and customer standards and conduct a regular review of its quality management system with the aim of continuous improvement in all aspects of its operations.

This policy is available for customers and members of the public on request or via our website www.brannan.co.uk

Signed: ABrannan Date: 16 April 2014

Andrew Brannan
Joint Managing Director

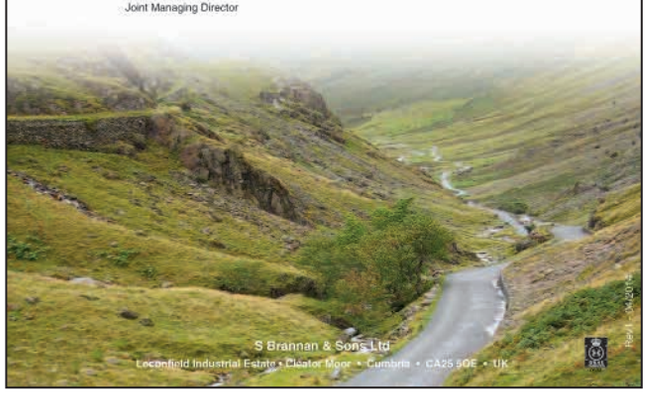

Brannan Ethical Policy

tel: +44 (0)1946 816600 fax: +44 (0)1946 816625 email: sales@brannan.co.uk web: www.brannan.co.uk

1 Scope
This Ethical Policy serves as a guideline for all the S.Brannan & Sons Ltd business activities and should be followed by all Brannan employees.

2 Working within the Law
Brannan will conform to all applicable laws and regulations in force in the country of operation and will not work with partners who break such laws and regulations.

3 Treating People Fairly
Brannan is comitted to:
Treating employees, customers and business partners with respect and dignity
Providing safe working conditions
Ensuring no use of child labour, forced labour or prison labour
Brannan will not work with partners who do not uphold such commitments.
Brannan has a specifc Dignity at Work Policy.
Report any illegal or unethical behaviour - Any observed potentially illegal or unethical activity should be reported to a member of the Brannan management team immediately. Any substantiated reports of such behaviour will be accepted in good faith and will not result in retaliatory action against the informer.

4 Acting with Integrity
Brannan is commited to acting with integrity and in good faith at all times.
Avoid giving or receiving improper gifts - Brannan does not permit or condone the gift or receipt of any other than token gifts. Brannan has a specifc Anti-Bribery Policy.
Market, sell and negotiate in good faith - Brannan does not permit or condone the use of misleading or dishonest marketing, selling or negotiating techniques.
Maintain confidentiality - Brannan's production methods, business methods, dealings with customers, sources of supply and other proprietry information are among our most valuable assets. Brannan is committed to safeguarding such company assets and providing confidentiality to its customers.

5 Ensuring Financial Probity
Brannan will ensure that its financial reporting accurately reflects the business transactions conducted and conforms with the applicable laws and regulations.

6 Annual Review
This policy wil be annually reviewed for suitability and efficacy.

Signed: ABrannan Date: 30 November 2012

Andrew Brannan
Joint Managing Director